


KTE60EX

Product family	Hood
Hood Type	Integrated (semi) hood
Design	Visible front panel
Extraction	Extraction
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709235604
Hood width	60 cm

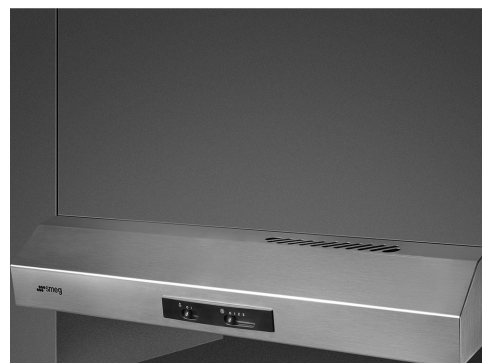

Aesthetics

Aesthetic	Universale	Components finishing	Stainless steel
Colour	Stainless steel	Serigraphy colour	Black
Finishing	Satin	Logo	Silk screen

Controls

Control setting	Slider
-----------------	--------

Programme / Functions

No. of speeds	3
---------------	---

Technical Features



No. of lights	2	No. of filters	1
Light type	LED	Anti-grease filters	Metallic multilayer
Light Power	3 W	Vent outlet	120 mm
Light color temperature scale (°K)	2700 °K	Minimum distance from GAS hob	750 mm
Free outlet maximum capacity	290 m³/h	Minimum distance from ELECTRIC hob	600 mm
Motor power	115 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	112	52
Speed 2	208	63
Speed 3	273	71

Performance / Energy Label




Annual Efficiency Consumption (AEChood)	66 kWh/a	Airbourne acouistical A-weighted sound Power Emission at minimum speed (SPEmin)	52 dB(A)
Energy efficiency class (EEC)	D	Airborne acouistical A-weighted sound Power Emission at maximum speed (SPEmax)	71 dB(A)
Fluid Dynamic Efficiency (FDE)	8.1	Time increase factor (F)	1.7
Fluid Dynamic Efficiency class (FDEC)	E	Energy Efficiency Index	90
Lighting Efficiency (LE)	16.1 lux/W	Measured air flow rate at best efficiency point (Qbep)	160 m³/h
Lighting Efficiency Class (LEC)	C	Measured air pressure at best efficiency point (Pbep)	180 Pa
Grease Filtering Efficiency (GFE)	66 %	Measured electric power input at best efficiency point (Wbep)	99 W
Grease Filtering Efficiency Class (GFEC)	D	Nominal Power consumption of the light system (WL)	6 W
Air flow at minumum speed (Qmin)	115 m³/h	Average illumination of the light on the cooking surface (Emiddle)	97 lux
Air flow at maximum speed (Qmax)	272 m³/h	Sound power level at highest setting (Lwa)	71 dB(A)

Electrical Connection

Electrical connection rating	121 W	Frequency (Hz)	50-60 Hz
Voltage	220-240 V	Power supply cable length	1500 mm

CAPPA	L ⁻⁰⁵
CM 60	599
CM 90	899

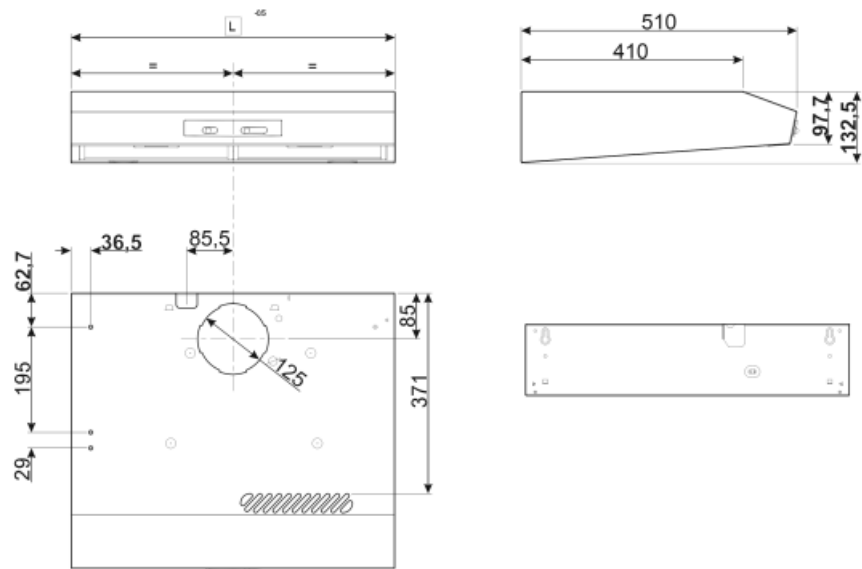

Not included accessories



KITFC550

Charcoal filters Kit 1 piece

Symbols glossary (TT)



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



D: Product energy rating, measured from A+++ to D / G depending on the product family.