

# KTR110XE

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Stainless steel
Type of steel Brushed

EAN code 8017709211714

Hood width 110 cm
Aesthetic Victoria
Colour Stainless steel

Finishing Satin Logo Applied



#### **Controls**

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

### **Program / Functions**

No. of speeds
Intensive speed

#### **Technical Features**



No. of lights 2 No. of filters 4

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature3000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	326	49
Speed 2	439	57



Speed 3	554	63
Intensive speed	784	71

### Performance / Energy Label

	K
/	+

**Annual Efficiency** 57 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-63 dBA Fluid Dynamic Efficiency 31,1 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 83,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 69.2 % Time increase factor (F) 1,00 Efficiency (GFE) **Energy Efficiency Index** 52,2 **Grease Filtering** Measured air flow rate 413 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 326 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured air pressure 456 Pa Air flow at maximum 554 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 784 m<sup>3</sup>/h Measured electric 168 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 183 lux the light on the cooking

#### **Electrical Connection**

Electrical connection 278 W Power supply cable 1500 mm

rating length
Voltage 220-240 V Plug Not p

Voltage 220-240 V Plug Not present Frequency (Hz) 50-60 Hz

#### Also available

Alternative colours White, Black, Cream Available colours KT110BE-KT110BLE - available KT110PE


SMEG SPA 30/11/2025

surface (Emiddle) Sound power level at

highest setting (Lwa)

63 dBA



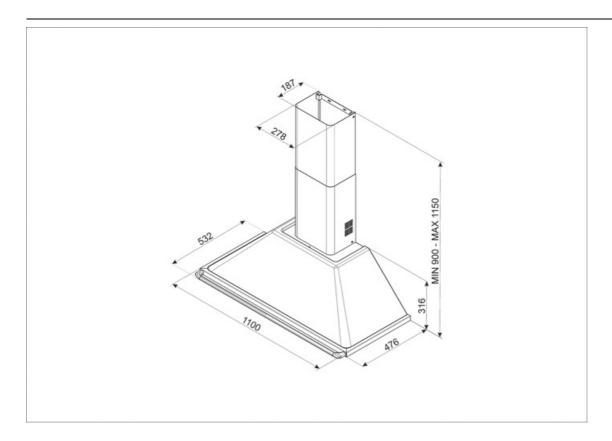



## **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)





#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### Symbols glossary



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.