

KTR110XE

Product family Hood

Hood Type Decorative wall hood

Design Chimney Extraction Extraction Stainless steel Material Type of steel Brushed

8017709211714 **EAN** code

Hood width 110 cm **Aesthetic** Victoria Colour Stainless steel

Finishing Satin Logo **Applied**



Controls

Control knobs **Control knobs** Victoria Control setting No. of controls Controls colour Steel effect 2

Program / Functions

No. of speeds Intensive speed



Technical Features



No. of lights 2

No. of filters Anti-grease filters Light type **LED** Aluminium 150 mm **Light Power** 1 W Vent outlet Minimum distance from 750 mm

Light color temperature 3000 K scale (K) GAS hob

Minimum distance from Free outlet maximum 820 m³/h 650 mm

ELECTRIC hob capacity

275 W Motor power Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	326	49
Speed 2	439	57

SMEG SPA 11/24/2025



Speed 3	554	63
Intensive speed	784	71

Performance / Energy Label

_	tr
	Ť

Annual Efficiency 57 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-63 dBA Fluid Dynamic Efficiency 31,1 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 71 dBA Lighting Efficiency (LE) 83,2 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 69.2 % Time increase factor (F) 1,00 Efficiency (GFE) **Energy Efficiency Index** 52,2 **Grease Filtering** Measured air flow rate 413 m³/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 326 m³/h (Qbep) speed (Qmin) Measured air pressure 456 Pa Air flow at maximum 554 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 784 m³/h Measured electric 168 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 183 lux the light on the cooking

Electrical Connection

Electrical connection 278 W Power supply cable

rating

length 220-240 V Plug Voltage Not present Frequency (Hz) 50-60 Hz

Also available

Alternative colours White, Black, Cream Available colours KT110BE-KT110BLE -

available KT110PE

SMEG SPA 11/24/2025


surface (Emiddle) Sound power level at

highest setting (Lwa)

63 dBA

1500 mm



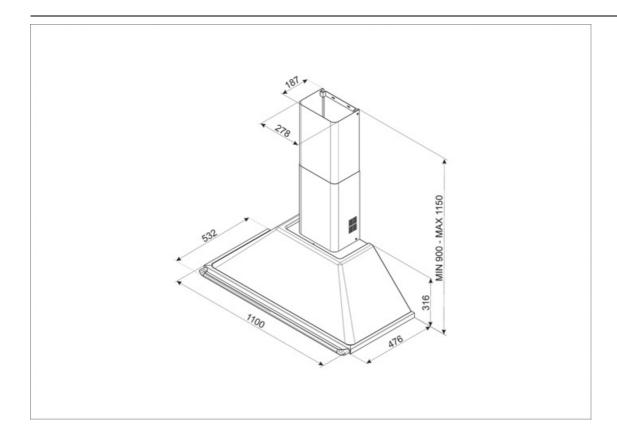

SMEG SPA 11/24/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)





KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

SMEG SPA 11/24/2025




Symbols glossary



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.





Intensive/turbo setting: when extra fast extraction is required.

SMEG SPA 11/24/2025