

KTR90XE

Product family Hood

Hood Type Chimney Cooker Hoods

Design Chimney

Extraction Ducted out or re-circulation possible

Material Stainless steel

Type of steel Brushed

EAN code 8017709211684

Hood width 90 cm

Aesthetics Victoria

Colour Stainless steel

Finishing Brushed

Logo Applied



Controls

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

Program / Functions

No. of speeds Intensive speed

3 800ST

Technical Features





No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight power1 WVent outlet150 mmLight colour3000 KMinimum distance from750 mm

temperature scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57



Speed 3	567	61
Intensive speed	788	69

Performance / Energy Label

_	tr
	Ť

Annual Efficiency 59 kWh/year Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficiency class (A speed (SPEmin) EEC) Airborne acoustical A-61 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102,3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 76.6 % Time increase factor (F) Efficiency (GFE) **Energy Efficiency Index** 52,4 **Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate 438 m³/h Air flow at minumum 334 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 567 m³/h Measured air pressure 434 Pa at best efficiency point Intensive extraction rate 788 m³/h (Qbep) Measured electric 176 W power input at best efficiency point (Wbep) Normal Power of the 2 W light system (WI) Average illumination of 225 lux the light on the cooking

Electrical Connection

Nominal power 278 W Frequency (Hz) 50-60 Hz Voltage 220-240 V Power supply cable 1000 mm length

Also available

Alternative colours White, Black, Cream Available colours KT90BE - KT90BLE - KT90PE


SMEG SPA 13/12/2025

surface (Emiddle) Sound power level at

highest setting (Lwa)

61 dBA



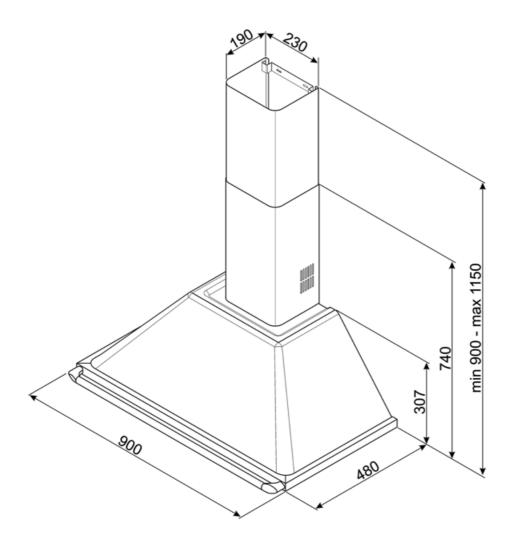



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



2 pieces)

KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

KITCMNKXU

Chimney extension dimension 227.5 * 190 * 800 Victoria hood Stainless Steel



Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.