

# KTR90XE

## Product family

Hood
Chimney Cooker Hoods
Chimney
Ducted out or re-circulation possible
Stainless steel
Brushed
8017709211684
90 cm
Victoria
Stainless steel
Brushed
Applied



## Controls

Control setting	Control knobs	Control knobs	Victoria
No. of controls	2	Controls colour	Steel effect

## Program / Functions

No. of speeds	3
Intensive speed	

## Technical Features



No. of lights	2	No. of filters	3
Light type	LED	Anti-grease filters	Aluminium
Light power	1 W	Vent outlet	150 mm
Light colour	3000 K	Minimum distance from GAS hob	750 mm
temperature scale (K)		Minimum distance from ELECTRIC hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Non return valve	Yes
Motor power	275 W		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	334	49
Speed 2	439	57

Speed 3	567	61
Intensive speed	788	69

## Performance / Energy Label




<b>Annual Efficiency Consumption (AEChood)</b>	59 kWh/year	<b>Airbourne acoustical A- weighted sound Power Emission at minimum speed (SPEmin)</b>	49 dBA
<b>Energy efficiency class ( A EEC)</b>		<b>Emission at maximum speed (SPEmax)</b>	61 dBA
<b>Fluid Dynamic Efficiency (FDE)</b>	30	<b>Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)</b>	69 dBA
<b>Fluid Dynamic Efficiency class (FDEC)</b>	A	<b>Time increase factor (F)</b>	1.00
<b>Lighting Efficiency (LE)</b>	102.3 lux/W	<b>Energy Efficiency Index per first cavity</b>	52.4
<b>Lighting Efficiency Class (LEC)</b>	A	<b>Measured air flow rate at best efficiency point (Qbep)</b>	438 m³/h
<b>Grease Filtering Efficiency (GFE)</b>	76.6 %	<b>Measured air pressure at best efficiency point (Qbep)</b>	434 Pa
<b>Grease Filtering Efficiency Class (GFEC)</b>	C	<b>Measured electric power input at best efficiency point (Wbep)</b>	176 W
<b>Air flow at minimum speed (Qmin)</b>	334 m³/h	<b>Normal Power of the light system (WI)</b>	2 W
<b>Maximum extraction rate</b>	567 m³/h	<b>Average illumination of the light on the cooking surface (Emiddle)</b>	225 lux
<b>Intensive extraction rate</b>	788 m³/h	<b>Sound power level at highest setting (Lwa)</b>	61 dBA

## Electrical Connection

<b>Nominal power</b>	278 W	<b>Power supply cable length</b>	1000 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	No
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

<b>Alternative colours available</b>	White, Black, Cream	<b>Available colours</b>	KT90BE - KT90BLE - KT90PE
--------------------------------------	---------------------	--------------------------	---------------------------

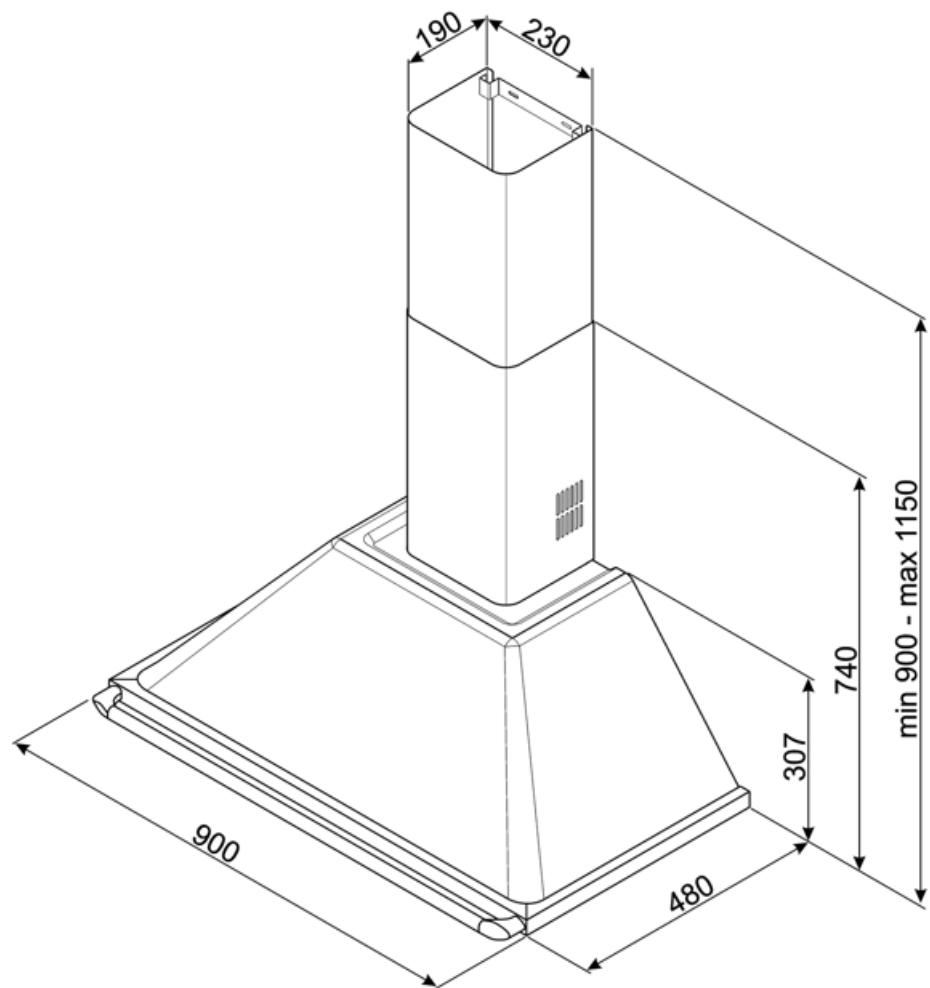

## Compatible Accessories

### FLT6

Round Charcoal filters (kit 2 pieces)



### KITCMNKXU

Chimney extension dimension 227.5 \* 190 \* 800 Victoria hood Stainless Steel



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

## Symbols glossary



**Filters:** Model has filters to help remove grease from the steam emanating from the pans during cooking.



**Lights:** All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



**A:** Product drying performance, measured from A+++ to D / G depending on the product family



**Intensive/turbo setting:** when extra fast extraction is required.