

# KTR90XE

Product family Hood

Hood Type Decorative wall hood

Design Chimney
Extraction Extraction
Material Stainless steel
Type of steel Brushed

EAN code 8017709211684

Hood width 90 cm

Aesthetic Victoria

Colour Stainless steel

Finishing Satin Logo Applied



## **Controls**

Control settingControl knobsControl knobsVictoriaNo. of controls2Controls colourSteel effect

## **Program / Functions**

No. of speeds Intensive speed



#### **Technical Features**



No. of lights 2 No. of filters 3

Light typeLEDAnti-grease filtersAluminiumLight Power1 WVent outlet150 mmLight color temperature3000 KMinimum distance from750 mm

scale (K) GAS hob

Free outlet maximum 820 m³/h Minimum distance from 650 mm

capacity ELECTRIC hob

Motor power 275 W Non return valve Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	334	49
Speed 2	439	57



Speed 3	567	61
Intensive speed	788	69

## Performance / Energy Label

	A***
/	7
<b>(</b>	1

**Annual Efficiency** 59 kWh/a Airbourne acouistical A- 49 dBA weighted sound Power Consumption (AEChood) **Emission at minimum** Energy efficieency class A speed (SPEmin) (EEC) Airborne acoustical A-61 dBA Fluid Dynamic Efficiency 30 weighted sound Power (FDE) **Emission at maximum** Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 69 dBA Lighting Efficiency (LE) 102,3 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 76.6 % Time increase factor (F) 1,00 Efficiency (GFE) **Energy Efficiency Index** 52,4 **Grease Filtering** Measured air flow rate 438 m<sup>3</sup>/h Efficiency Class (GFEC) at best efficiency point Air flow at minumum 334 m<sup>3</sup>/h (Qbep) speed (Qmin) Measured air pressure 434 Pa Air flow at maximum 567 m<sup>3</sup>/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 788 m<sup>3</sup>/h Measured electric 176 W (Qboost) power input at best efficiency point (Wbep) **Nominal Power** 2 W consumption of the light system (WL) Average illumination of 225 lux the light on the cooking surface (Emiddle)

#### **Electrical Connection**

**Electrical connection** 278 W

rating

length 220-240 V Plug Voltage Frequency (Hz) 50-60 Hz

1000 mm

61 dBA

Not present

### Also available

KT90BE - KT90BLE -Alternative colours White, Black, Cream Available colours available KT90PE


**SMEG SPA** 27/11/2025

Sound power level at

highest setting (Lwa)

Power supply cable



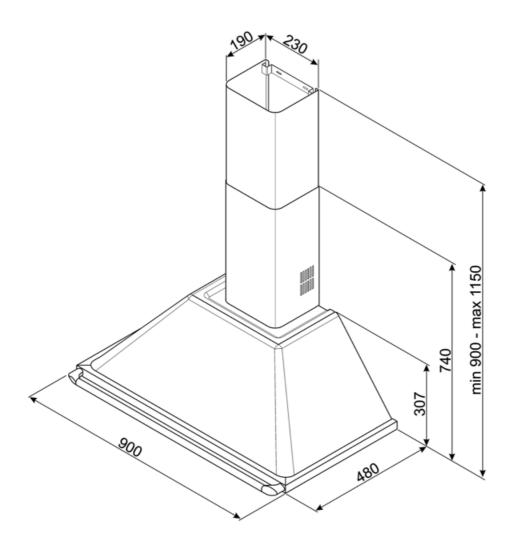



## **Compatible Accessories**

#### FLT6

Round Charcoal filters (kit 2 pieces)



# KITCMNKXU

Chimney extension size 227.5 \* 190 \* 800 mm stainless steel, allow to reach 1475 mm of total high of the hood



#### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



# Symbols glossary



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Energy efficiency class A



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Intensive/turbo setting: when extra fast extraction is required.