

# KTR90XE

|                  |                      |
|------------------|----------------------|
| Product family   | Hood                 |
| Tipo de Exaustor | Decorative wall hood |
| Design           | Chimney              |
| Extraction       | Extraction           |
| Material         | Stainless steel      |
| Type of steel    | Brushed              |
| EAN code         | 8017709211684        |
| Aesthetic        | Victoria             |
| Colour           | Stainless steel      |
| Acabamento       | Satin                |
| Logotipo         | Logotipo aplicado    |



## Controls

|                 |               |                 |              |
|-----------------|---------------|-----------------|--------------|
| Control setting | Control knobs | Control knobs   | Victoria     |
| No. of controls | 2             | Controls colour | Steel effect |

## Program / Functions

|                         |                                                                                     |
|-------------------------|-------------------------------------------------------------------------------------|
| No. of speeds           | 3                                                                                   |
| Intensive speed         |  |
| 24h air filter function | No                                                                                  |
| Other functions         | No                                                                                  |
| Time-setting options    | No                                                                                  |
| Other options           | No                                                                                  |
| Ventilação automática   | No                                                                                  |

## Technical Features

|                                                                                    |                                                                                     |                               |           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------|-----------|
|  |  |                               |           |
| Hood without motor                                                                 | No                                                                                  | No. of filters                | 3         |
| Remote motor                                                                       | No                                                                                  | Anti-grease filters           | Aluminium |
| No. of lights                                                                      | 2                                                                                   | Charcoal filters included     | No        |
| Light type                                                                         | LED                                                                                 | Filter replacement indicator  | No        |
| Light Power                                                                        | 1 W                                                                                 | Vent outlet                   | 150 mm    |
| Dimmer mode                                                                        | No                                                                                  | Minimum distance from GAS hob | 750 mm    |
| Escala de temperatura de cor clara (°K)                                            | 3000 °K                                                                             |                               |           |

|                              |          |                                    |        |
|------------------------------|----------|------------------------------------|--------|
| Free outlet maximum capacity | 820 m³/h | Minimum distance from ELECTRIC hob | 650 mm |
| Motor power                  | 275 W    | Non return valve                   | Yes    |

|                 | Extraction rate IEC 61591 [m³/h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|----------------------------------|----------------------------------|
| Speed 1         | 334                              | 49                               |
| Speed 2         | 439                              | 57                               |
| Speed 3         | 567                              | 61                               |
| Intensive speed | 788                              | 69                               |

## Accessories Included

|                |    |                |    |
|----------------|----|----------------|----|
| Remote control | No | Tube reduction | No |
| Sliding door   | No |                |    |

## Performance / Energy Label




|                                          |             |                                                                                |          |
|------------------------------------------|-------------|--------------------------------------------------------------------------------|----------|
| Consumo anual de energia (CAE exaustor)  | 59 kWh/a    | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 49 dBA   |
| Energy efficiency class (EEC)            | A           | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 61 dBA   |
| Fluid Dynamic Efficiency (FDE)           | 30          | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 69 dBA   |
| Fluid Dynamic Efficiency class (FDEC)    | A           | Time increase factor (F)                                                       | 1,00     |
| Lighting Efficiency (LE)                 | 102,3 lux/W | Energy Efficiency Index                                                        | 52,4     |
| Lighting Efficiency Class (LEC)          | A           | Measured air flow rate at best efficiency point (Qbep)                         | 438 m³/h |
| Grease Filtering Efficiency (GFE)        | 76,6 %      | Measured air pressure at best efficiency point (Pbep)                          | 434 Pa   |
| Grease Filtering Efficiency Class (GFEC) | C           | Measured electric power input at best efficiency point (Wbep)                  | 176 W    |
| Air flow at minumum speed (Qmin)         | 334 m³/h    | Nominal Power consumption of the light system (WL)                             | 2 W      |
| Air flow at maximum speed (Qmax)         | 567 m³/h    | Average illumination of the light on the cooking surface (Emiddle)             | 225 lux  |
| Air flow at boost speed (Qboost)         | 788 m³/h    | Sound power level at highest setting (Lwa)                                     | 61 dBA   |

## Electrical Connection

|                              |           |                                    |          |
|------------------------------|-----------|------------------------------------|----------|
| Plug                         | No        | Frequency (Hz)                     | 50-60 Hz |
| Electrical connection rating | 278 W     | Comprimento do cabo de alimentação | 1000 mm  |
| Voltage                      | 220-240 V |                                    |          |

## Also available

|                          |                      |                                      |                           |
|--------------------------|----------------------|--------------------------------------|---------------------------|
| Outras cores disponíveis | Branca, Preta, Creme | Códigos das outras cores disponíveis | KT90BE - KT90BLE - KT90PE |
|--------------------------|----------------------|--------------------------------------|---------------------------|

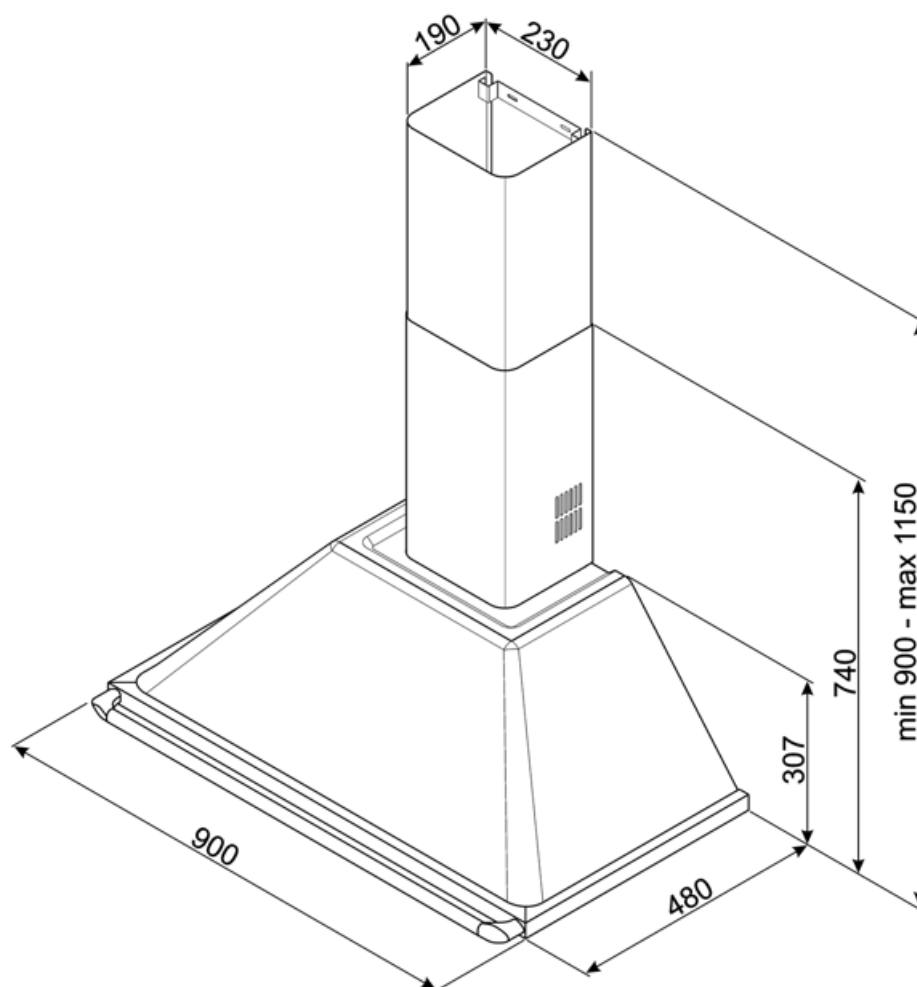

---

## Compatible Accessories

---



### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITCMNKXU

Dimensão de extensão da chaminé  
227.5 \* 190 \* 800 Exaustor Victoria de  
aço inoxidável



### KITALLFC

Filtro de carvão universal Aço  
inoxidável AISI 304 O filtro pode ser  
lavado na máquina lava-louça a 50 °C  
(água e detergente adequado) e para  
secar colocar no forno 180°C 25  
minutos

---

## Symbols glossary

---



R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Configuração intensiva/turbo: quando a extração extra rápida é necessária.