

KTS75

Product family	Hood
Tipo de Exaustor	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	No
Material	Stainless steel
Type of steel	Brushed
EAN code	8017709099732
Hood width	
Aesthetic	Linea
Colour	Stainless steel
Acabamento	Satin
Glass Type	Stopsol
Cor da serigrafia	Serigrafia em cinzento
Logotipo	Logotipo serigrafado



Controls

Control setting	Electronic buttons	Led color	White
-----------------	--------------------	-----------	-------

Program / Functions

No. of speeds	4
Intensive speed	No
24h air filter function	No
Other functions	No
Time-setting options	
Other options	No

Technical Features



Hood without motor	No	Motor power	200 W
Remote motor	No	No. of filters	1
No. of lights	2	Anti-grease filters	Stainless steel
Light type	Halogen	Charcoal filters included	No
Light Power	20 W	Filter replacement indicator	Yes
Dimmer mode	No	Vent outlet	150 mm
Free outlet maximum capacity	715 m³/h	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2- 13 [dBA]
Speed 1	248	44
Speed 2	290	55
Speed 3	400	62
Speed 4	643	65

Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

Performance / Energy Label



Consumo anual de energía (CAE exaustor)	102 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	44 dBA
Energy efficiency class (EEC)	C	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	65 dBA
Fluid Dynamic Efficiency (FDE)	22,2	Time increase factor (F)	1,00
Fluid Dynamic Efficiency class (FDEC)	C	Measured air flow rate at best efficiency point (Qbep)	390 m³/h
Lighting Efficiency (LE)	3,9 lux/W	Measured air pressure at best efficiency point (Pbep)	341 Pa
Lighting Efficiency Class (LEC)	G	Measured electric power input at best efficiency point (Wbep)	643 W
Grease Filtering Efficiency (GFE)	37,6 %	Nominal Power consumption of the light system (WL)	166 W
Grease Filtering Efficiency Class (GFEC)	G	Average illumination of the light on the cooking surface (Emiddle)	157 lux
Air flow at minumum speed (Qmin)	248 m³/h	Sound power level at highest setting (Lwa)	65 dBA
Air flow at maximum speed (Qmax)	643 m³/h		

Electrical Connection

Plug	No	Voltage	220-240 V
Electrical connection rating	240 W	Frequency (Hz)	50-60 Hz


Current	1 A	Comprimento do cabo de alimentação	1500 mm
---------	-----	------------------------------------	---------

Also available


Outras cores disponíveis Branca, Preta

Optional accessories

Charcoal filter	KITFC906	Non return valve	No
Remote control	No	Kit with aesthetic components	No
Chimney extension	No	Diffuser kit	No
Vent outlet	No		

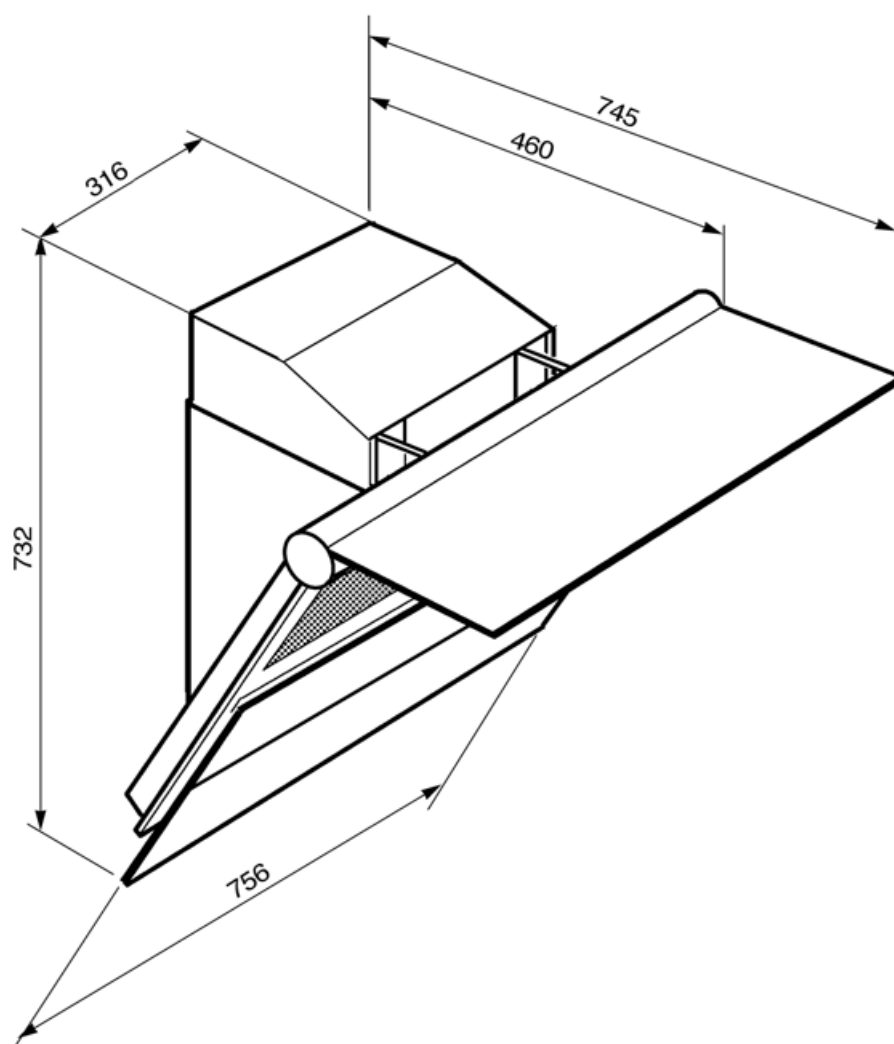

Compatible Accessories



KITFC906

Kit filtro de carvão 1 peça

Symbols glossary



Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.



Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.



Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.



Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.