

# KV194B3



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709327903
Hood width	90 cm







## Aesthetics

Aesthetic	Linea	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Silk screen

## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features

						No. of lights	2	Anti-grease filters	Stainless steel
						Light type	LED	Charcoal filters included	Yes
						Light Power	2.1 W		

Dimmer mode	Yes	Filter replacement indicator	Yes
Light color temperature range	2700° - 4000° °K	Vent outlet	150 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from GAS hob	650 mm
Motor power	275 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	41 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	71 dB(A)
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dB(A)
Fluid Dynamic Efficiency (FDE)	36.2	Power Consumption in Off mode (Po)	0.49 W
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0.99 W
Lighting Efficiency (LE)	34.8 lux/W	Time increase factor (F)	0.7
Lighting Efficiency Class (LEC)	A	Energy Efficiency Index	41.2
Grease Filtering Efficiency (GFE)	64.3 %	Measured air flow rate at best efficiency point (Qbep)	403 m³/h
Grease Filtering Efficiency Class (GFEC)	E	Measured air pressure at best efficiency point (Pbep)	479 Pa
Air flow at mininum speed (Qmin)	277 m³/h	Measured electric power input at best efficiency point (Wbep)	148 W
Air flow at maximum speed (Qmax)	636 m³/h	Nominal Power consumption of the light system (WL)	5 W
Air flow at boost speed (Qboost)	782 m³/h	Average illumination of the light on the cooking surface (Emiddle)	139 lux
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dB(A)	Sound power level at highest setting (Lwa)	71 dB(A)

## Electrical Connection





Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	279 W	Power supply cable length	1500 mm
Voltage	220-240 V		

## Also available

Alternative colours available Neptune Grey

Available colours

KV194G

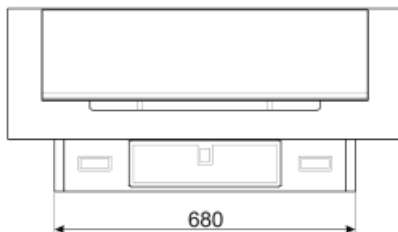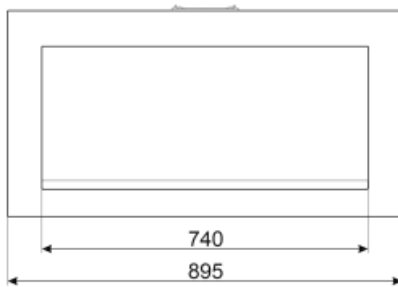

---

## Not included accessories

---



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITFCKV1













Kit 2 pcs Charcoal Filter for Hood KV1\*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.



### KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm

## Symbols glossary (TT)

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
	Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Intensive/turbo setting: when extra fast extraction is required.		Connection between hob and hood
	Dimmering Lights		Tunable white from warm to cold