

KV194B3



| | |
|-----------------------------|----------------------|
| Product family | Hood |
| Hood Type | Decorative wall hood |
| Design | Angled |
| Extraction | Extraction |
| Electronic control | Yes |
| Perimeter extraction | Yes |
| Material | Glass |
| EAN code | 8017709327903 |
| Hood width | 90 cm |
| Aesthetic | Linea |
| Colour | Black |
| Finishing | Glass |
| Glass Type | Black |
| Serigraphy colour | Grey |
| Logo | Silk screen |



Controls

| | | | |
|------------------------|-------------------------------------|------------------|-------|
| Control setting | Touch control back-lighted White | Led color | White |
|------------------------|-------------------------------------|------------------|-------|

Program / Functions

| | |
|--------------------------------|---|
| No. of speeds | 3 |
| Intensive speed |  |
| 24h air filter function |  |
| Time-setting options |  |
| Auto-vent 2.0 |  |

Technical Features



| | | | |
|--------------------------------------|-----------------------|---|-----------------|
| No. of lights | 2 | No. of filters | 2 |
| Light type | LED | Anti-grease filters | Stainless steel |
| Light Power | 2.1 W | Filter replacement indicator | Yes |
| Dimmer mode | Yes | Vent outlet | 150 mm |
| Light color temperature range | 2700 - 4000 K | Minimum distance from GAS hob | 650 mm |
| Free outlet maximum capacity | 820 m ³ /h | Minimum distance from ELECTRIC hob | 450 mm |
| Motor power | 275 W | | |

Non return valve

Yes

| | Extraction rate IEC 61591 [m ³ /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1 | 277 | 50 |
| Speed 2 | 406 | 63 |
| Speed 3 | 636 | 70 |
| Intensive speed | 782 | 72 |

Accessories included



Charcoal filters included Yes

Performance / Energy Label



| | | | |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood) | 41 kWh/a | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 50 dBA |
| Energy efficiency class (EEC) | A+ | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax) | 70 dBA |
| Fluid Dynamic Efficiency (FDE) | 36.2 | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 72 dBA |
| Fluid Dynamic Efficiency class (FDEC) | A | Time increase factor (F) | 0.7 |
| Lighting Efficiency (LE) | 34.8 lux/W | Energy Efficiency Index | 41.2 |
| Lighting Efficiency Class (LEC) | A | Measured air flow rate at best efficiency point (Qbep) | 403 m ³ /h |
| Grease Filtering Efficiency (GFE) | 64.3 % | Measured air pressure at best efficiency point (Pbep) | 479 Pa |
| Grease Filtering Efficiency Class (GFEC) | E | Measured electric power input at best efficiency point (Wbep) | 148 W |
| Air flow at minumum speed (Qmin) | 277 m ³ /h | Nominal Power consumption of the light system (WL) | 5 W |
| Air flow at maximum speed (Qmax) | 636 m ³ /h | Average illumination of the light on the cooking surface (Emiddle) | 139 lux |
| Air flow at boost speed (Qboost) | 782 m ³ /h | Sound power level at highest setting (Lwa) | 71 dBA |





Electrical Connection

| | | | |
|-------------------------------------|-----------|----------------------------------|-------------|
| Electrical connection rating | 279 W | Power supply cable length | 1500 mm |
| Voltage | 220-240 V | Plug | Not present |
| Frequency (Hz) | 50-60 Hz | | |

Also available

Alternative colours available Neptune Grey

Available colours KV194G

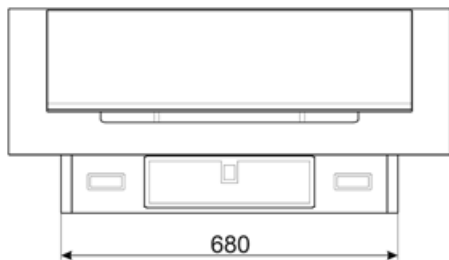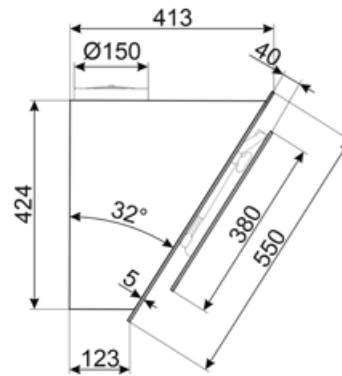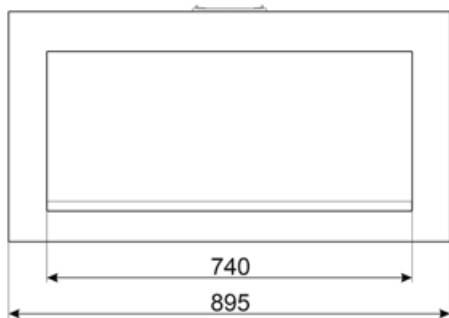

Compatible Accessories



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITCMNKVX

Chimney Extension in Stainless Steel for hood KV*series Dimensions 300x200x850 mm



KITCMNKVMB













Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm



KITFCKV1

Kit 2 pcs Charcoal Filter for Hood KV1*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.

Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Connection between hob and hood
-  Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.
-  Dimmering Lights
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Tunable white from warm to cold.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.
-  Warning light(s): to advise when filters need changing.
-  Perimeter extraction panels: very efficient and aid noise reduction.
-  Intensive/turbo setting: when extra fast extraction is required.