

# KV194B3



<b>Product family</b>	Hood
<b>Hood Type</b>	Decorative wall hood
<b>Design</b>	Angled
<b>Extraction</b>	Extraction
<b>Electronic control</b>	Yes
<b>Perimeter extraction</b>	Yes
<b>Material</b>	Glass
<b>EAN code</b>	8017709327903
<b>Hood width</b>	90 cm
<b>Aesthetic</b>	Linea
<b>Colour</b>	Black
<b>Finishing</b>	Glass
<b>Glass Type</b>	Black
<b>Serigraphy colour</b>	Grey
<b>Logo</b>	Silk screen



## Controls

<b>Control setting</b>	Touch control back-lighted White	<b>Led color</b>	White
------------------------	-------------------------------------	------------------	-------

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Time-setting options</b>	
<b>Auto-vent 2.0</b>	

## Technical Features



<b>No. of lights</b>	2	<b>No. of filters</b>	2
<b>Light type</b>	LED	<b>Anti-grease filters</b>	Stainless steel
<b>Light Power</b>	2,1 W	<b>Filter replacement indicator</b>	Yes
<b>Dimmer mode</b>	Yes	<b>Vent outlet</b>	150 mm
<b>Light color temperature range</b>	2700 - 4000 K	<b>Minimum distance from GAS hob</b>	650 mm
<b>Free outlet maximum capacity</b>	820 m <sup>3</sup> /h	<b>Minimum distance from ELECTRIC hob</b>	450 mm
<b>Motor power</b>	275 W		

Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	41 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	70 dBA
Fluid Dynamic Efficiency (FDE)	36,2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,7
Lighting Efficiency (LE)	34,8 lux/W	Energy Efficiency Index	41,2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	403 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	64,3 %	Measured air pressure at best efficiency point (Pbep)	479 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	148 W
Air flow at minumum speed (Qmin)	277 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	636 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	139 lux
Air flow at boost speed (Qboost)	782 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	71 dBA





## Electrical Connection

<b>Electrical connection rating</b>	279 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

**Alternative colours available** Neptune Grey

**Available colours** KV194G

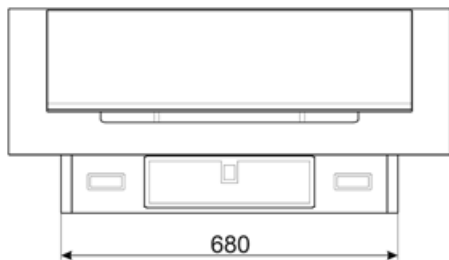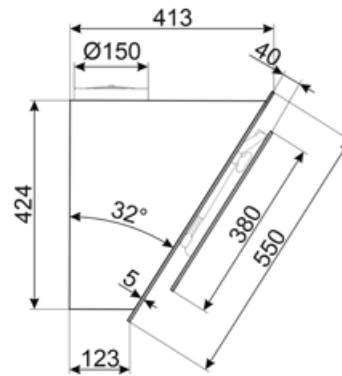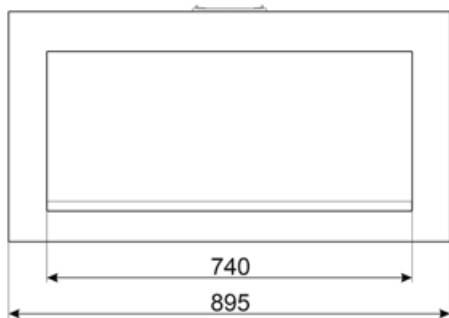

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series Dimensions 300x200x850 mm



### KITCMNKVMB













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITFCKV1

Kit 2 pcs Charcoal Filter for Hood KV1\*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Perimeter extraction panels: very efficient and aid noise reduction.   |
|   | Intensive/turbo setting: when extra fast extraction is required.  |   | Connection between hob and hood  |
|  | Dimmering Lights  |  | Tunable white from warm to cold.   |