

# KV194B3



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709327903
Hood width	90 cm
Aesthetic	Linea
Colour	Black
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	2	No. of filters	2
Light type	LED	Anti-grease filters	Stainless steel
Light Power	2.1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	450 mm
Motor power	275 W		

Non return valve

Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	41 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	70 dBA
Fluid Dynamic Efficiency (FDE)	36.2	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	34.8 lux/W	Energy Efficiency Index	41.2
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	403 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	64.3 %	Measured air pressure at best efficiency point (Pbep)	479 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	148 W
Air flow at minumum speed (Qmin)	277 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at maximum speed (Qmax)	636 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	139 lux
Air flow at boost speed (Qboost)	782 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	71 dBA





## Electrical Connection

<b>Electrical connection rating</b>	279 W	<b>Power supply cable length</b>	1500 mm
<b>Voltage</b>	220-240 V	<b>Plug</b>	Not present
<b>Frequency (Hz)</b>	50-60 Hz		

## Also available

**Alternative colours available** Neptune Grey

**Available colours** KV194G

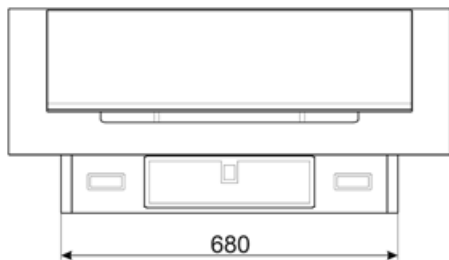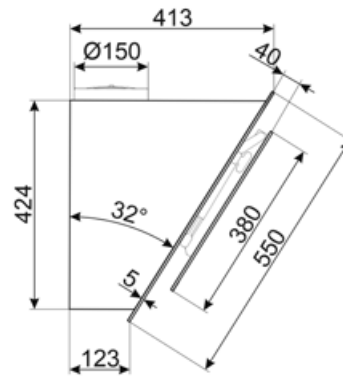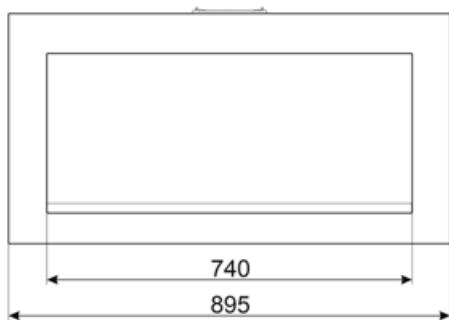

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series Dimensions 300x200x850 mm



### KITCMNKVMB













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITFCKV1

Kit 2 pcs Charcoal Filter for Hood KV1\*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.

## Symbols glossary

	24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.		Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
	A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.		Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
	Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.		Warning light(s): to advise when filters need changing.
	Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.		Perimeter extraction panels: very efficient and aid noise reduction.
	Intensive/turbo setting: when extra fast extraction is required.		Connection between hob and hood
	Dimmering Lights		Tunable white from warm to cold.