

KV194G



Product family

Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709327897
Hood width	90 cm
Aesthetics	Linea
Colour	Neptune Grey
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen



Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light power	2,1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour	2700 - 4000 K	Minimum distance from GAS hob	650 mm
temperature range		Minimum distance from ELECTRIC hob	450 mm
Free outlet maximum capacity	820 m ³ /h		
Motor power	275 W		

No. of filters 2 Non return valve Yes

	Extraction rate IEC 61591 [m ³ /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

Performance / Energy Label

 		
Annual Efficiency Consumption (AEchood)	41 kWh/year	Airbourne acoustical A- weighted sound Power
Energy efficiency class (A+ EEC)		Emission at minimum speed (SPEmin)
Fluid Dynamic Efficiency (FDE)	36,2	Airborne acoustical A- weighted sound Power
Fluid Dynamic Efficiency class (FDEC)	A	Emission at maximum speed (SPEmax)
Lighting Efficiency (LE)	34,8 lux/W	Airbourne acoustical A- weighted sound power emission at boost speed (SPEboost)
Lighting Efficiency Class (LEC)	A	
Grease Filtering Efficiency (GFE)	64,3 %	Time increase factor (F)
Grease Filtering Efficiency Class (GFEC)	E	Energy Efficiency Index per first cavity
Air flow at minimum speed (Qmin)	277 m ³ /h	Measured air flow rate at best efficiency point (Qbep)
Maximum extraction rate	636 m ³ /h	Measured air pressure at best efficiency point (Qbep)
Intensive extraction rate	782 m ³ /h	Measured electric power input at best efficiency point (Wbep)
		Normal Power of the light system (WI)
		Average illumination of the light on the cooking surface (Emiddle)
		Sound power level at highest setting (Lwa)


Electrical Connection

Nominal power	279 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

Also available




Alternative colours
available

Black

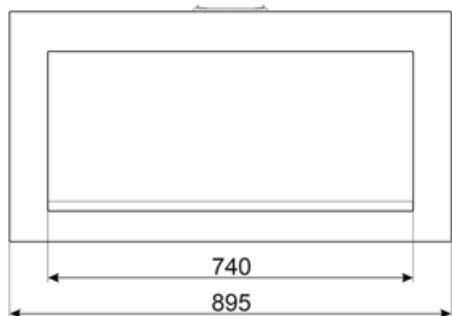

Available colours

KV194B3

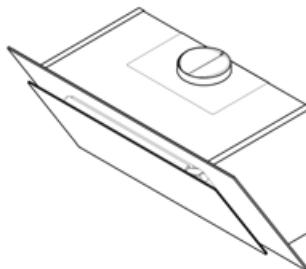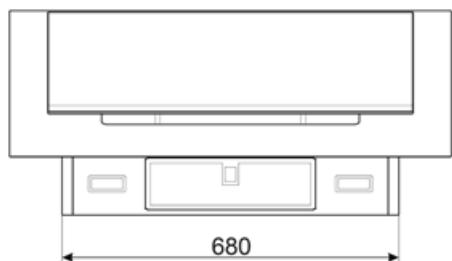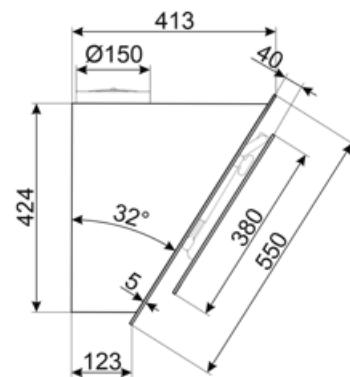

Compatible Accessories

**KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

**KITCMNKVX**

Chimney Extension in Stainless Steel for hood KV*series

**KITCMNKVMB**

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm

**KITFCKV1**

Kit 2 pcs Charcoal Filter for Hood KV1*series

Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Connection between hob and hood



...



...