

# KV194G







Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709327897
Aesthetic	Linea
Colour	Neptune Grey
Finishing	Glass
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

## Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light Power	2.1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light color temperature range	2700° - 4000° °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m³/h	Minimum distance from ELECTRIC hob	450 mm
Motor power	275 W	Non return valve	Yes
No. of filters	2		

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	277	50
Speed 2	406	63
Speed 3	636	70
Intensive speed	782	72

## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	41 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	71 dBA
Energy efficiency class (EEC)	A+	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	72 dBA
Fluid Dynamic Efficiency (FDE)	36,2	Power Consumption in Off mode (Po)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0,99 W
Lighting Efficiency (LE)	34,8 lux/W	Time increase factor (F)	0,7
Lighting Efficiency Class (LEC)	A	Energy Efficiency Index	41,2
Grease Filtering Efficiency (GFE)	64,3 %	Measured air flow rate at best efficiency point (Qbep)	403 m <sup>3</sup> /h
Grease Filtering Efficiency Class (GFEC)	E	Measured air pressure at best efficiency point (Pbep)	479 Pa
Air flow at mininum speed (Qmin)	277 m <sup>3</sup> /h	Measured electric power input at best efficiency point (Wbep)	148 W
Air flow at maximum speed (Qmax)	636 m <sup>3</sup> /h	Nominal Power consumption of the light system (WL)	5 W
Air flow at boost speed (Qboost)	782 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	139 lux
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	50 dBA	Sound power level at highest setting (Lwa)	71 dBA

## Electrical Connection

Plug	Not present	Frequency (Hz)	50-60 Hz
Electrical connection rating	279 W	Power supply cable length	1500 mm
Voltage	220-240 V		





## Also available

Alternative colours  
available

Black

Available colours

KV194B3

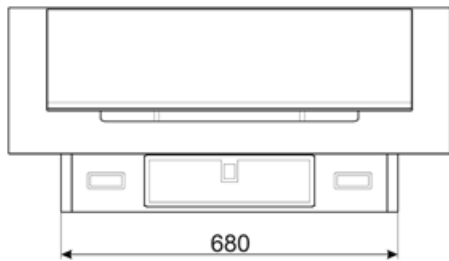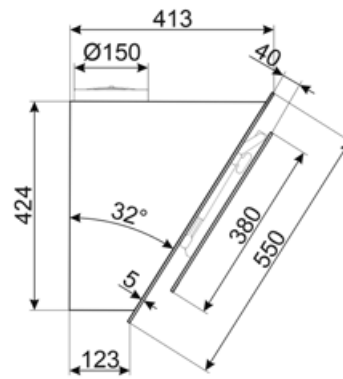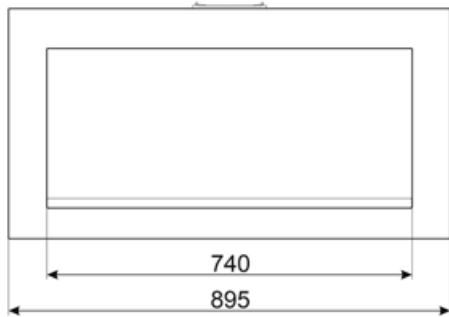

---

## Compatible Accessories

---



### KITALLFC

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITCMNKVMB













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITFCKV1

Kit 2 pcs Charcoal Filter for Hood KV1\*series. Dishwasher-safe. Size 320x80 mm and 280 x280 mm.

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Perimeter extraction panels: very efficient and aid noise reduction.   |
|   | Intensive/turbo setting: when extra fast extraction is required.  |   | Connection between hob and hood  |
|  | Dimming Lights  |  | Tunable white from warm to cold  |

## Benefit (TT)

---

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display

### **Autovent 2.0**

Centralized and practical control via Bluetooth connection between hob and hood

The Auto-Vent 2.0 system enables automatic hood management through connection with the hob: both appliances switch on simultaneously, and the extraction power adjusts in real time to the cooking intensity.