

KV26N



Product family Hood

Hood Type Chimney Cooker Hoods

Design

Extraction Ducted out or re-circulation possible

Electronic control Yes Yes Perimeter extraction Material Glass

EAN code 8017709290610

Hood width 60 cm **Aesthetics** Universal Colour Black **Finishing** Glass Glass Type Black Serigraphy colour White Silk screen Logo



Controls

Control setting Touch control back-lighted Led colour White

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options





Technical Features


















temperature scale (K)

Free outlet maximum 670 m³/h

capacity

Motor power 230 W No. of filters 2







Charcoal filters included Yes Filter replacement Yes indicator

Vent outlet 150 mm Minimum distance from 650 mm

GAS hob

Minimum distance from

ELECTRIC hob

Non return valve

450 mm

Yes

SMEG SPA 26/11/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]	
Speed 1	242	44	
Speed 2	326	51	
Speed 3	420	58	
Intensive speed	666	67	

Performance / Energy Label

/	Λ	K-
		Ď

Annual Efficiency 49 kWh/year Airbourne acouistical A- 44 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficiency class (A speed (SPEmin) Airborne acoustical A-Fluid Dynamic Efficiency 31,5 weighted sound Power (FDE) Emission at maximum Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 67 dBA Lighting Efficiency (LE) 118,6 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 77,0 % Time increase factor (F) Efficiency (GFE) **Energy Efficiency Index Grease Filtering** per first cavity Efficiency Class (GFEC) Measured air flow rate Air flow at minumum 242 m³/h at best efficiency point speed (Qmin) (Qbep) Maximum extraction 420 m³/h Measured air pressure rate at best efficiency point Intensive extraction rate 666 m³/h (Qbep) Measured electric power input at best efficiency point (Wbep) Normal Power of the light system (WI)

58 dBA

51,1

363 m³/h

453 Pa

145 W

2 W

261 lux

58 dBA

Average illumination of

the light on the cooking surface (Emiddle) Sound power level at

highest setting (Lwa)

Electrical Connection

Nominal power 232 W Frequency (Hz) 50-60 Hz 1500 mm 220-240 V Power supply cable Voltage length

Also available

SMEG SPA 26/11/2025




Alternative colours availible

White, Silver Glass

Available colours

KV26S-KV26B

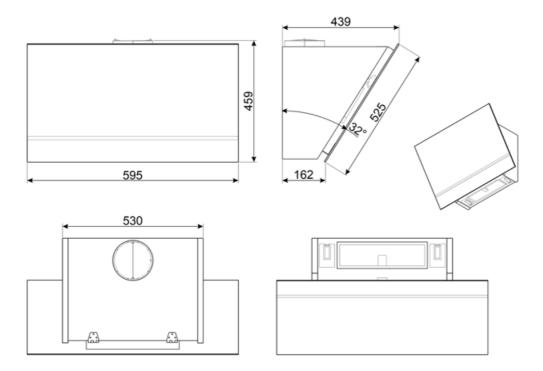

SMEG SPA 26/11/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

KITCMNKVX

Chimney Extension in Stainless Steel for hood KV*series





Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



A: Product drying performance, measured from A+++ to D / G depending on the product family



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



..

SMEG SPA 26/11/2025