

# KV26S






<b>Product family</b>	Hood
<b>Tipo de Exaustor</b>	Decorative wall hood
<b>Design</b>	Angled
<b>Extraction</b>	Extraction
<b>Electronic control</b>	Yes
<b>Perimeter extraction</b>	Yes
<b>Material</b>	Glass
<b>EAN code</b>	8017709290634
<b>Aesthetic</b>	Universal
<b>Colour</b>	Silver
<b>Acabamento</b>	Glass
<b>Glass Type</b>	Black
<b>Cor da serigrafia</b>	Serigrafia em branco
<b>Logotipo</b>	Logotipo serigrafado



## Controls

<b>Control setting</b>	Controle de toque retroiluminado Branco	<b>Display</b>	No
<b>Led color</b>	White		

## Program / Functions

<b>No. of speeds</b>	3
<b>Intensive speed</b>	
<b>24h air filter function</b>	
<b>Other functions</b>	No
<b>Time-setting options</b>	
<b>Other options</b>	No
<b>Ventilação automática</b>	No
<b>Ventilação automática 2.0</b>	No

## Technical Features



<b>Hood without motor</b>	No	<b>No. of filters</b>	2
<b>Remote motor</b>	No	<b>Anti-grease filters</b>	Aluminium
<b>No. of lights</b>	2	<b>Charcoal filters included</b>	Yes
<b>Light type</b>	LED	<b>Filter replacement indicator</b>	Yes
<b>Light Power</b>	1.1 W	<b>Vent outlet</b>	150 mm
<b>Dimmer mode</b>	Yes		

Escala de temperatura de cor clara (°K)	4000 °K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	670 m³/h	Minimum distance from ELECTRIC hob	450 mm
Motor power	230 W	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	242	44
Speed 2	326	51
Speed 3	420	58
Intensive speed	666	67

## Accessories Included

Remote control	No	Tube reduction	No
Sliding door	No		

## Performance / Energy Label



Consumo anual de energia (CAE exaustor)	49 kWh/a	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	44 dBA
Energy efficiency class (EEC)	A	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	58 dBA
Fluid Dynamic Efficiency (FDE)	31,5	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	67 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	118,6 lux/W	Energy Efficiency Index	51,1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	363 m³/h
Grease Filtering Efficiency (GFE)	77,0 %	Measured air pressure at best efficiency point (Pbep)	453 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	145 W
Air flow at minumum speed (Qmin)	242 m³/h	Nominal Power consumption of the light system (WL)	2 W
Air flow at maximum speed (Qmax)	420 m³/h	Average illumination of the light on the cooking surface (Emiddle)	261 lux
Air flow at boost speed (Qboost)	666 m³/h		

Sound power level at highest setting (Lwa) 58 dBA

## Electrical Connection


Plug No  
Electrical connection rating 232 W  
Voltage 220-240 V

Frequency (Hz) 50-60 Hz  
Comprimento do cabo de alimentação 1500 mm

## Also available

Outras cores disponíveis Branca, Preta

Códigos das outras cores disponíveis KV26N-KV26B

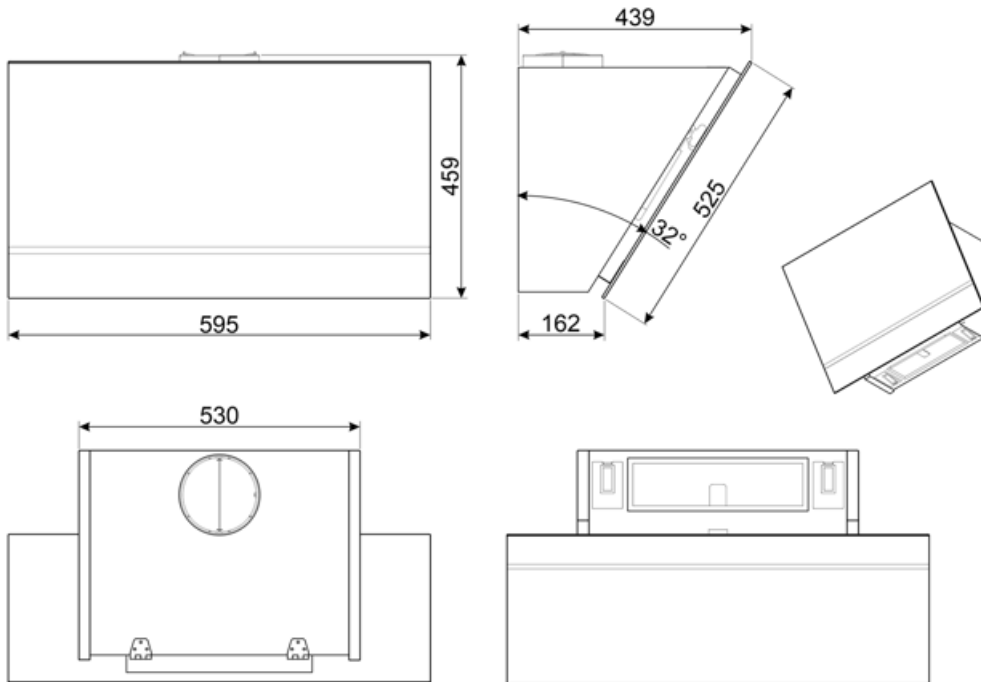

---

## Compatible Accessories

---

### FLT6

Filtros de carvão redondos (kit 2 peças)



### KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITALLFC

Filtro de carvão universal Aço inoxidável AISI 304 O filtro pode ser lavado na máquina lava-louça a 50 °C (água e detergente adequado) e para secar colocar no forno 180°C 25 minutos













### KITCMNKVX

Extensão da chaminé em aço inoxidável para capuz da série KV\*



## Symbols glossary

	24h: Quando selecionada, esta função refresca o ar durante cerca de 10 minutos a cada hora durante um período de 24 horas, a uma velocidade mínima e a um nível de ruído imperceptível.		Filtros: O modelo tem filtros para ajudar a remover a graxa do vapor que emana das panelas durante o cozimento.
	Desligar automaticamente: Uma configuração especial, para ser executada após o final do cozimento por um tempo pré-definido e, em seguida, desligar automaticamente.		Filtros de carvão: Extrair através de filtros de carvão ou diretamente para o exterior diminui consideravelmente os fortes odores de cozimento.
	R: Desempenho de secagem do produto, medido de A++ a D/G, dependendo da família de produtos		Luzes de escurecimento
	Luz(s) de aviso: para avisar quando os filtros precisam ser trocados.		Luzes: Todos os exaustores possuem luzes para iluminar a área de cozinhar ou adicionar ao ambiente da cozinha.
	Painéis de extração de perímetro: muito eficiente e ajuda na redução de ruído.		Configuração intensiva/turbo: quando a extração extra rápida é necessária.

---

## Benefit (TT)

---

### **Perimetral aspiration**

Optimized extraction through the perimeter aspiration system

Perimeter aspiration enhances extraction efficiency by directing vapors along the edges of the panel beneath the filters, optimizing air capture

### **Dimmering & Tunable lights**

Customized lighting with LED lights featuring adjustable intensity and color temperature, from warm to cool tones

### **Touch display back lighted white**

Intuitive and immediate usability thanks to the elegant white LED backlit touch display