

KV28N



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709290603
Hood width	80 cm






Aesthetics

Aesthetics	Universal	Glass Type	Black
Colour	Black	Serigraphy colour	White
Finishing	Glass	Logo	Silk screen


Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

Programs / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	

Technical Features

    	No. of lights	2	Anti-grease filters	Aluminium
	Light type	LED	Charcoal filters included	Yes
	Light power	1,1 W	Filter replacement indicator	Yes
	Dimmer mode	Yes		

Light colour temperature scale (°K)	4000 °K	Vent outlet	150 mm
Free outlet maximum capacity	670 m³/h	Minimum distance from GAS hob	650 mm
Motor power	230 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	242	44
Speed 2	326	51
Speed 3	420	58
Intensive speed	666	67

Performance / Energy Label

A

Annual Efficiency Consumption (AEChood)	49 kWh/year	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	58 dB(A)
Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	67 dB(A)
Fluid Dynamic Efficiency (FDE)	31,5	Power consumption in stand-by mode (Ps)	0,49 W
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0,9
Lighting Efficiency (LE)	118,6 lux/W	Energy Efficiency Index per first cavity	51,1
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	363 m³/h
Grease Filtering Efficiency (GFE)	77,0 %	Measured air pressure at best efficiency point (Qbep)	453 Pa
Grease Filtering Efficiency Class (GFEC)	C	Measured electric power input at best efficiency point (Wbep)	145 W
Air flow at minimum speed (Qmin)	242 m³/h	Normal Power of the light system (WI)	2 W
Maximum extraction rate	420 m³/h	Average illumination of the light on the cooking surface (Emiddle)	261 lux
Intensive extraction rate	666 m³/h	Sound power level at highest setting (Lwa)	58 dB(A)
Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	44 dB(A)		


Electrical Connection

Nominal power	232 W	Frequency (Hz)	50-60 Hz
---------------	-------	----------------	----------

Voltage	220-240 V	Power supply cable length	1500 mm
----------------	-----------	----------------------------------	---------

Also available

Alternative colours available	White, Silver Glass	Available colours	KV28S-KV28B
--------------------------------------	---------------------	--------------------------	-------------

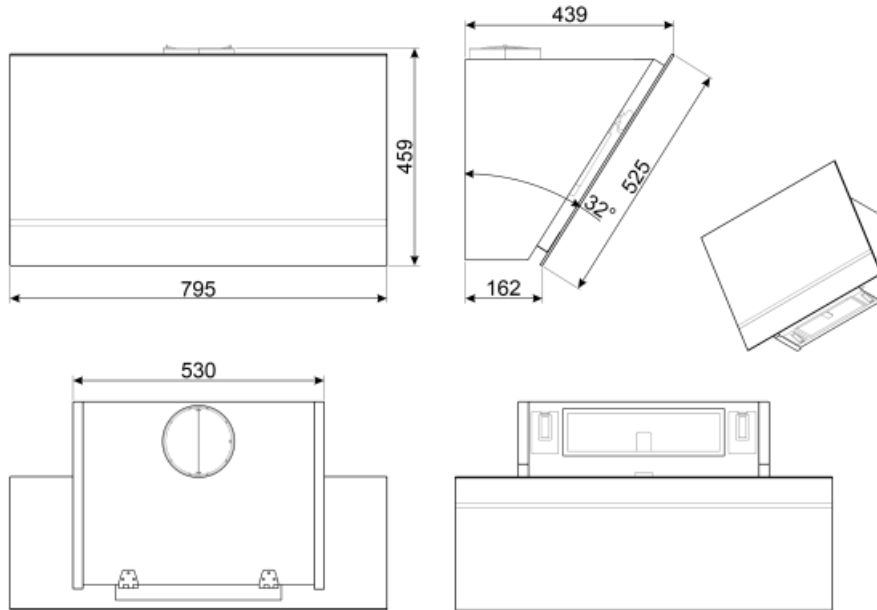

Not included accessories



KITCMNSSKV

Chimney extension in Stainless Steel suitable for Vertical Hood (KV* series), size 200 * 200 * 850 mm



KITCMNKV

Chimney extension Matt Black color suitable for Vertical Hood (KV* series), size 200 * 200 * 850 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



FLT6

Round Charcoal filters (kit 2 pieces)



KITCMNKVX











Chimney Extension in Stainless Steel for hood KV*series



KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm

Symbols glossary

- | | | | |
|--|---|---|---|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |  | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably. |
|  | ... |  | A: Product drying performance, measured from A+++ to D / G depending on the product family |
|  | Warning light(s): to advise when filters need changing. |  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |
|  | Perimeter extraction panels: very efficient and aid noise reduction. |  | Intensive/turbo setting: when extra fast extraction is required. |