

KV28N



Product family Hood

Decorative wall hood **Hood Type**

Design Angled Extraction Extraction **Electronic control** Yes Perimeter extraction Yes Material Glass

EAN code 8017709290603

Hood width 80 cm Universale **Aesthetic** Colour Black **Finishing** Glass Glass Type Black Serigraphy colour White Silk screen Logo



Controls

Control setting Touch control back-lighted Led color White

White

Program / Functions

No. of speeds Intensive speed

24h air filter function

Time-setting options





Technical Features











670 m³/h

No. of lights 2 Light type **LED Light Power** 1,1 W Dimmer mode Light color temperature 4000 K

scale (K)

Free outlet maximum

capacity

Motor power 230 W No. of filters 2

Anti-grease filters

Charcoal filters included Yes Filter replacement indicator

Vent outlet Minimum distance from

GAS hob

Minimum distance from **ELECTRIC hob**

Non return valve

650 mm 450 mm

150 mm

Aluminium

Yes

Yes

SMEG SPA 7/12/2025



	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704- 2-13 [dBA]
Speed 1	242	44
Speed 2	326	51
Speed 3	420	58
Intensive speed	666	67

Performance / Energy Label

<	Α	A"
		D

Annual Efficiency 49 kWh/a Airbourne acouistical A- 44 dBA Consumption (AEChood) weighted sound Power **Emission at minimum** Energy efficieency class A speed (SPEmin) Airborne acoustical A-Fluid Dynamic Efficiency 31,5 weighted sound Power (FDE) Emission at maximum Fluid Dynamic Efficiency A speed (SPEmax) class (FDEC) Airbourne acoustical A- 67 dBA Lighting Efficiency (LE) 118,6 lux/W weighted sound power Lighting Efficiency Class A emission at boost speed (LEC) (SPEboost) **Grease Filtering** 77,0 % Time increase factor (F) 0,9 Efficiency (GFE) **Energy Efficiency Index Grease Filtering** Measured air flow rate Efficiency Class (GFEC) at best efficiency point Air flow at minumum 242 m³/h speed (Qmin) Measured air pressure Air flow at maximum 420 m³/h at best efficiency point speed (Qmax) (Pbep) Air flow at boost speed 666 m³/h Measured electric (Qboost) power input at best efficiency point (Wbep) **Nominal Power** consumption of the light system (WL)

Electrical Connection

Electrical connection 232 W

rating

220-240 V Voltage Frequency (Hz) 50-60 Hz

Power supply cable

Average illumination of

the light on the cooking surface (Emiddle) Sound power level at

highest setting (Lwa)

length

Plug Not present

58 dBA

51,1

363 m³/h

453 Pa

145 W

2 W

261 lux

58 dBA

1500 mm

Also available

7/12/2025 **SMEG SPA**




Alternative colours available

White, Silver Glass

Available colours

KV28S-KV28B

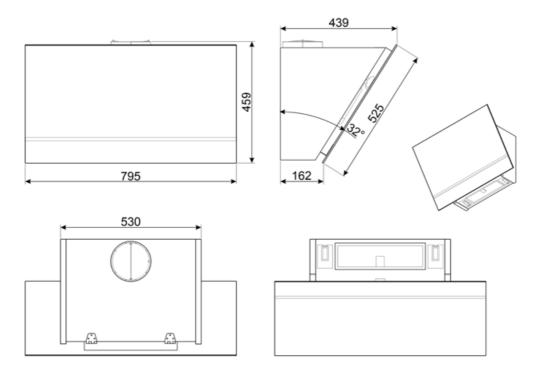

SMEG SPA 7/12/2025



Compatible Accessories

FLT6

Round Charcoal filters (kit 2 pieces)



SMEG SPA

KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes

KITCMNKVX

Chimney Extension in Stainless Steel for hood KV*series Dimensions 300x200x850 mm

7/12/2025





Symbols glossary



24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.



Energy efficiency class A



Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.



Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.



Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.



Warning light(s): to advise when filters need changing.



Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.



Perimeter extraction panels: very efficient and aid noise reduction.



Intensive/turbo setting: when extra fast extraction is required.



Dimmering Lights

SMEG SPA 7/12/2025