

# KV394MB



|                      |                      |
|----------------------|----------------------|
| Product family       | Hood                 |
| Hood Type            | Decorative wall hood |
| Design               | Angled               |
| Extraction           | Extraction           |
| Electronic control   | Yes                  |
| Perimeter extraction | Yes                  |
| Material             | Glass                |
| EAN code             | 8017709319816        |
| Hood width           | 90 cm                |
| Aesthetic            | Universale           |
| Colour               | Matt Black           |
| Finishing            | Matt                 |
| Glass Type           | Black                |
| Serigraphy colour    | Grey                 |
| Logo                 | Silk screen          |



## Controls

|                 |                                     |           |       |
|-----------------|-------------------------------------|-----------|-------|
| Control setting | Touch control back-lighted<br>White | Led color | White |
|-----------------|-------------------------------------|-----------|-------|

## Program / Functions

|                         |   |
|-------------------------|---|
| No. of speeds           | 3   |
| Intensive speed         |  |
| 24h air filter function |  |
| Time-setting options    |  |
| Auto-vent 2.0           |  |

## Technical Features



|                                   |                       |                                    |           |
|-----------------------------------|-----------------------|------------------------------------|-----------|
| No. of lights                     | 2                     | No. of filters                     | 2         |
| Light type                        | LED                   | Anti-grease filters                | Aluminium |
| Light Power                       | 1,1 W                 | Filter replacement indicator       | Yes       |
| Dimmer mode                       | Yes                   | Vent outlet                        | 150 mm    |
| Light color temperature scale (K) | 4000 K                | Minimum distance from GAS hob      | 650 mm    |
| Free outlet maximum capacity      | 730 m <sup>3</sup> /h | Minimum distance from ELECTRIC hob | 450 mm    |

Motor power 230 W Non return valve Yes

|                 | Extraction rate IEC 61591 [m <sup>3</sup> /h] | Noise level IEC 60704-2-13 [dBA] |
|-----------------|---|----------------------------------|
| Speed 1         | 285   | 47                               |
| Speed 2         | 374   | 54                               |
| Speed 3         | 493   | 60                               |
| Intensive speed | 729   | 69                               |

## Accessories included



Charcoal filters included Yes

## Performance / Energy Label






|  |                       |  |                       |
|--|-----------------------|--|-----------------------|
| Annual Efficiency Consumption (AEChood)  | 53 kWh/a              | Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin) | 47 dBA                |
| Energy efficiency class (EEC)            | A                     | Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)  | 61 dBA                |
| Fluid Dynamic Efficiency (FDE)           | 31,4                  | Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost) | 69 dBA                |
| Fluid Dynamic Efficiency class (FDEC)    | A                     | Time increase factor (F)   | 0,9                   |
| Lighting Efficiency (LE)                 | 118,5 lux/W           | Energy Efficiency Index  | 51,6                  |
| Lighting Efficiency Class (LEC)          | A                     | Measured air flow rate at best efficiency point (Qbep)                         | 397 m <sup>3</sup> /h |
| Grease Filtering Efficiency (GFE)        | 73,8 %                | Measured air pressure at best efficiency point (Pbep)                          | 443 Pa                |
| Grease Filtering Efficiency Class (GFEC) | D                     | Measured electric power input at best efficiency point (Wbep)                  | 155 W                 |
| Air flow at minumum speed (Qmin)         | 285 m <sup>3</sup> /h | Nominal Power consumption of the light system (WL)                             | 2 W                   |
| Air flow at maximum speed (Qmax)         | 493 m <sup>3</sup> /h | Average illumination of the light on the cooking surface (Emiddle)             | 237 lux               |
| Air flow at boost speed (Qboost)         | 729 m <sup>3</sup> /h | Sound power level at highest setting (Lwa)                                     | 61 dBA                |

## Electrical Connection

Electrical connection rating 232 W  
Voltage 220-240 V  
Frequency (Hz) 50-60 Hz

Power supply cable length 1500 mm  
Plug Not present

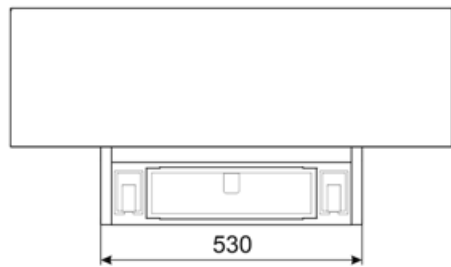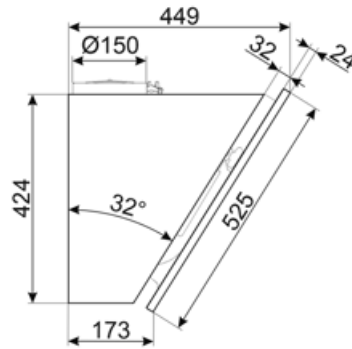

---

## Compatible Accessories

---



### FLT6

Round Charcoal filters (kit 2 pieces)



### KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### KITALLFC












Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### KITCMNKVX

Chimney Extension in Stainless Steel for hood KV\*series Dimensions 300x200x850 mm

## Symbols glossary

-  24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level.
-  Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.
-  Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.
-  Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.
-  Intensive/turbo setting: when extra fast extraction is required.
-  Dimmering Lights
-  Energy efficiency class A
-  Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.
-  Warning light(s): to advise when filters need changing.
-  Perimeter extraction panels: very efficient and aid noise reduction.
-  Connection between hob and hood