

KV394N



Product family	Hood
Hood Type	Decorative wall hood
Design	Angled
Extraction	Extraction
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709305758
Hood width	90 cm







Aesthetics

Aesthetic	Universale	Glass Type	Black
Colour	Black	Serigraphy colour	Grey
Finishing	Glass	Logo	Silk screen


Controls

Control setting	Touch control back-lighted White	Led color	White
-----------------	-------------------------------------	-----------	-------

Programme / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-vent 2.0	

Technical Features



No. of lights	2	Anti-grease filters	Aluminium
Light type	LED	Charcoal filters included	Yes
Light Power	1,1 W		

Dimmer mode	Yes	Filter replacement indicator	Yes
Light color temperature scale (°K)	4000 °K	Vent outlet	150 mm
Free outlet maximum capacity	730 m³/h	Minimum distance from GAS hob	650 mm
Motor power	230 W	Minimum distance from ELECTRIC hob	450 mm
No. of filters	2	Non return valve	Yes

	Extraction rate IEC 61591 [m³/h]	Noise level IEC 60704-2-13 [dB(A)]
Speed 1	285	47
Speed 2	374	54
Speed 3	493	60
Intensive speed	729	69





Performance / Energy Label

A	Annual Efficiency Consumption (AEChood)	53 kWh/a	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	61 dB(A)
	Energy efficiency class (EEC)	A	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	69 dB(A)
	Fluid Dynamic Efficiency (FDE)	31.4	Power Consumption in Off mode (Po)	0.49 W
	Fluid Dynamic Efficiency class (FDEC)	A	Power consumption in stand-by mode (Ps)	0.99 W
	Lighting Efficiency (LE)	118.5 lux/W	Time increase factor (F)	0.9
	Lighting Efficiency Class (LEC)	A	Energy Efficiency Index	51.6
	Grease Filtering Efficiency (GFE)	73.8 %	Measured air flow rate at best efficiency point (Qbep)	397 m³/h
	Grease Filtering Efficiency Class (GFEC)	D	Measured air pressure at best efficiency point (Pbep)	443 Pa
	Air flow at minumum speed (Qmin)	285 m³/h	Measured electric power input at best efficiency point (Wbep)	155 W
	Air flow at maximum speed (Qmax)	493 m³/h	Nominal Power consumption of the light system (WL)	2 W
	Air flow at boost speed (Qboost)	729 m³/h	Average illumination of the light on the cooking surface (Emiddle)	237 lux
	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dB(A)	Sound power level at highest setting (Lwa)	61 dB(A)

Electrical Connection

Electrical connection rating 232 W
Voltage 220-240 V

Frequency (Hz) 50-60 Hz
Power supply cable length 1500 mm

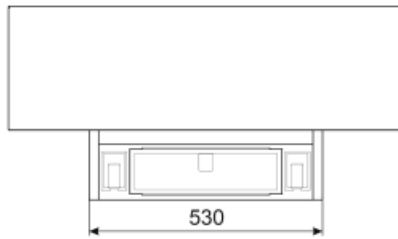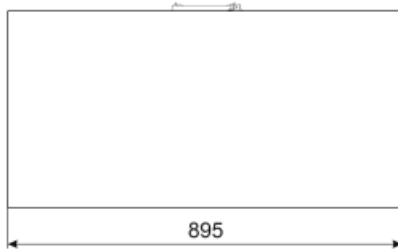

Not included accessories



FLT6

Round Charcoal filters (kit 2 pieces)



KITALLFC

Universal Charcoal filter Stainless Steel AISI 304 The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



KITCMNKVX












Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm



KITCMNKVMB

Chimney Extension in Stainless Steel for hood KV*series 300 mm*200 mm + 500/850 mm

Symbols glossary (TT)

- | | | | |
|---|---|---|--|
|  | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |  | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking. |
|  | Connection between hob and hood |  | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically. |
|  | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably. |  | Dimmering Lights |
|  | A: Product drying performance, measured from A+++ to D / G depending on the product family |  | Warning light(s): to advise when filters need changing. |
|  | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen. |  | Perimeter extraction panels: very efficient and aid noise reduction. |
|  | Intensive/turbo setting: when extra fast extraction is required. | | |