

# KV694R







Product family	Hood
Hood Type	Chimney Cooker Hoods
Design	Angled
Extraction	Ducted out or re-circulation possible
Electronic control	Yes
Perimeter extraction	Yes
Material	Glass
EAN code	8017709305789
Hood width	90 cm
Aesthetics	Dolce Stil Novo
Colour	Black
Finishing	Copper
Glass Type	Black
Serigraphy colour	Grey
Logo	Silk screen



## Controls

Control setting	Touch control back-lighted White	Led colour	White
-----------------	-------------------------------------	------------	-------

## Program / Functions

No. of speeds	3
Intensive speed	
24h air filter function	
Time-setting options	
Auto-Vent 2.0	

## Technical Features



No. of lights	2	Anti-grease filters	Stainless steel
Light type	LED	Charcoal filters included	Yes
Light power	2.1 W	Filter replacement indicator	Yes
Dimmer mode	Yes	Vent outlet	150 mm
Light colour temperature range	2700 - 4000 K	Minimum distance from GAS hob	650 mm
Free outlet maximum capacity	820 m <sup>3</sup> /h	Minimum distance from ELECTRIC hob	450 mm
Motor power	275 W		

No. of filters 2 Non return valve Yes

	Extraction rate IEC 61591 [m <sup>3</sup> /h]	Noise level IEC 60704-2-13 [dBA]
Speed 1	265	47
Speed 2	391	55
Speed 3	621	66
Intensive speed	777	70





## Performance / Energy Label



Annual Efficiency Consumption (AEChood)	42 kWh/year	Airbourne acoustical A-weighted sound Power Emission at minimum speed (SPEmin)	47 dBA
Energy efficiency class (EEC)	A+	Airborne acoustical A-weighted sound Power Emission at maximum speed (SPEmax)	67 dBA
Fluid Dynamic Efficiency (FDE)	35.6	Airbourne acoustical A-weighted sound power emission at boost speed (SPEboost)	70 dBA
Fluid Dynamic Efficiency class (FDEC)	A	Time increase factor (F)	0.7
Lighting Efficiency (LE)	35.5 lux/W	Energy Efficiency Index per first cavity	41.3
Lighting Efficiency Class (LEC)	A	Measured air flow rate at best efficiency point (Qbep)	400 m <sup>3</sup> /h
Grease Filtering Efficiency (GFE)	64.2 %	Measured air pressure at best efficiency point (Qbep)	485 Pa
Grease Filtering Efficiency Class (GFEC)	E	Measured electric power input at best efficiency point (Wbep)	151 W
Air flow at mininum speed (Qmin)	265 m <sup>3</sup> /h	Normal Power of the light system (WI)	4 W
Maximum extraction rate	621 m <sup>3</sup> /h	Average illumination of the light on the cooking surface (Emiddle)	142 lux
Intensive extraction rate	777 m <sup>3</sup> /h	Sound power level at highest setting (Lwa)	67 dBA

## Electrical Connection

Nominal power	279 W	Power supply cable length	1500 mm
Voltage	220-240 V	Plug	No
Frequency (Hz)	50-60 Hz		

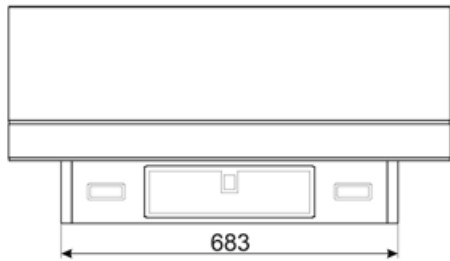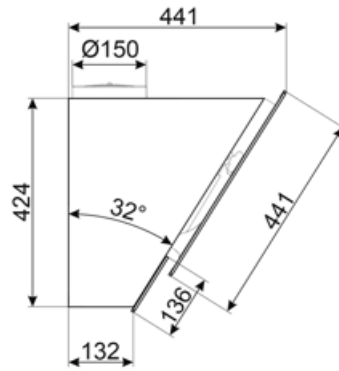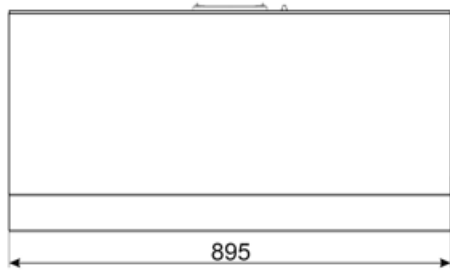

---

## Compatible Accessories

---



### **KITALLFC**

Universal Charcoal filter Stainless Steel AISI 304. The filter can be washed in dishwasher 50 °C (water and suitable detergent) and to dry it put in the oven 180°C 25 minutes



### **KITCMNKVX**

Chimney Extension in Stainless Steel for hood KV\*series



### **KITCMNKVMB**













Chimney Extension in Stainless Steel for hood KV\*series 300 mm\*200 mm + 500/850 mm



### **KITFCKV6**

Kit 3 pcs of charcoal filter for vertical hood KV6\* series

## Symbols glossary

- |   |   |  |  |
|---|---|--|--|
|   | 24h: When selected this function refreshes the air for c. 10 minutes every hour over a 24 hour period, at minimum speed and an imperceptible noise level. |   | A+: Energy efficiency class A+ helps to save up to 10% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |
|   | Filters: Model has filters to help remove grease from the steam emanating from the pans during cooking.   |   | Switch off automatically: A special setting, to run after the end of cooking for a pre-set time and then switch off automatically.             |
|   | Charcoal filters: Extracting through charcoal filters or directly to the exterior lessens strong cooking odours considerably.                             |   | Warning light(s): to advise when filters need changing.  |
|   | Lights: All cooker hoods feature lights to illuminate the cooking area or add to the ambience of the kitchen.   |   | Perimeter extraction panels: very efficient and aid noise reduction.   |
|   | Intensive/turbo setting: when extra fast extraction is required.  |   | Connection between hob and hood  |
|  | Dimmering Lights  |  | Tunable white from warm to cold.   |