

LE102S

Sink material Stainless steel
Type Welded sink
No. of bowls 1 + 1/2
Drainer Left

EAN code 8017709129705



Aesthetics

AestheticUniversaleBuilding in typeUltra-low profileSeriesRigaeLogoEmbossed

Colour Stainless steel Half bowl cup drainer Yes

Finishing Brushed Tap hole / precut tap 1 Tap hole

hole

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Traditional	0.6	340 x 400 x 180	180	80	Yes, traditional	Wall position	3.5"
LH Bowl	Half bowl	0.7	165 x 300 x 130	130	80		Centre of bowl	3.5"

Technical Features



Frame thickness 0,6 mm Tap hole 1
Frame depth (mm) 18 Dividing wall width 30 mm

Dimensions of the 198x1010x510 mm Drainer inclination 2°

product (mm) Gasket type Sealing paste
Cutout dimension 980 X 490 mm No. of clips 8

topmount (mm)

Type of clips Standard



Undermount cutout

15 mm

radius

Height from kitchen top


Base unit size

6 mm 60 cm

Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips,

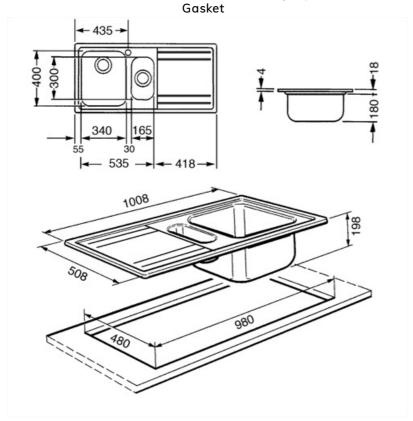



Compatible Accessories

CB34



Single wooden chopping board to fit STD radius 340 x 400 mm bowl



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



RND2V

2 Bowls standard Rondò waste kit with rectangular overflow



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser



Symbols glossary



Cupboard width required for sink installation



Sink depth - depending on the model, the depth can be from 13 to 24.5



Sink depth - depending on the model, the depth can be from 13 to 24,5 $\,$



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Benefit (TT)

Two bowls

Two bowls for greater versatility and dual functionality

Drainer

The drawer allows dishes, cutlery and kitchen utensils to be placed directly on the sink after washing: excess water can drain into the sink, allowing for natural drying

Tap hole

Possibility of having the tap hole for direct installation of the tap on the sink, for a larger and neater surface area