

LE862

Sink material Stainless steel
Type Welded sink

No. of bowls 2

EAN code 8017709129682



Aesthetics

AestheticUniversaleBuilding in typeUltra-low profileSeriesRigaeLogoEmbossed

Colour Stainless steel Tap hole / precut tap 1 Tap hole

Finishing Brushed hole

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Traditional	0.6	340 x 400 x 180	180	80	Yes, traditional	Wall position	3.5"
LH Bowl	Traditional	0.6	340 x 400 x 180	180	80		Wall position	3.5"

Technical Features



Frame thickness 0,6 mm Base unit size 80 cm Frame depth (mm) 12 Tap hole 1

Dimensions of the 193x868x508 mm Dividing wall width 30 mm product (mm) Gasket type Segling

oroduct (mm) Gasket type Sealing paste

Cutout dimension 840 x 480 mm No. of clips topmount (mm)

Type of clips Standard

Undermount cutout

radius

15 mm




Height from kitchen top 6 mm

Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket

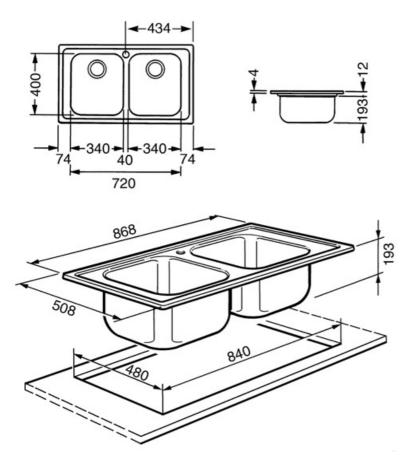



Compatible Accessories

CB34



Single wooden chopping board to fit STD radius 340 x 400 mm bowl



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



RND2V

2 Bowls standard Rondò waste kit with rectangular overflow



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser



Symbols glossary



Cupboard width required for sink installation



Sink depth - depending on the model, the depth can be from 13 to 24.5



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Benefit (TT)

Two bowls

Two bowls for greater versatility and dual functionality

Tap hole

Possibility of having the tap hole for direct installation of the tap on the sink, for a larger and neater surface area