

LFT100S

Stainless steel Sink material Welded sink Type

No. of bowls 1 Drainer Left

EAN code 8017709210427



Aesthetics





Aesthetic Universale Building in type Flush fitted. Flat Colour Stainless steel Logo **Embossed Finishing** Scotch Brite Tap hole / precut tap 2 Tapholes hole

Series Mira

Bowl Bowl Bowl Bowl Radius corner Strainer Strainer Overflow thickness dimensions, depth type RH right bowl (mm) position dimension WxDxH (mm) (mm) (mm) RHMinimum Yes, flush Wall 1 500 x 400 x 200 200 15 3.5" radius Bowl fitted position

Technical Features



Frame thickness 0,7 mm Tap hole diameter 35 mm Frame depth (mm) 18 Popup command Yes, single Dimensions of the 218x1010x510 mm Popup command type Squared

product (mm) **Drainer inclination**

Cutout dimension 980 x 480 mm Gasket type Sealing paste topmount (mm)

No. of clips 12 **Undermount cutout** 5 mm

radius Standard Type of clips

Height from kitchen top 1 mm Base unit size 80 cm Tap hole 2


SMEG SPA 10/10/2025



Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

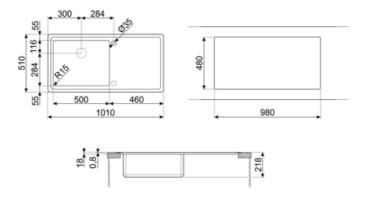

SMEG SPA 10/10/2025



Compatible Accessories





Siphon single bowl sinks (dishwasher connection included)

CB28QU



Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm

COL19H



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm

DB34



St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth

KITFD075



Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITSLTRND1



Bowl automatic pop up Rondò waste kit with rectangular overflow and round knob

CB25MN



Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe

COL19



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm

COL36



St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm

KITFD050



Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITFD100



Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

STABMIX



Tap stabiliser

SMEG SPA 10/10/2025



Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Flat: Installation of product with flat edge.



Flush-fitted installation: Models of sinks/hobs which are integrated flush with the tabletop of a kitchen unit.

SMEG SPA 10/10/2025