LFT102D

Sink material	Stainless steel
Type	Welded sink
No. of bowls	1 + 3/4
Drainer	Right
EAN code	8017709210397



Aesthetics

Aesthetic	Universale	**Building in type**	Flush fitted, Flat
Colour	Stainless Steel	**Logo**	Embossed
Finishing	Scotch Brite	**Tap hole / precut tap hole**	2 Tapholes
Series	Mira		

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Minimum radius	1	180 x 340 x 156	156	15		Wall position	3.5"
LH Bowl	Minimum radius	1	340 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"


Technical Features

Frame thickness	0,7 mm	**Tap hole diameter**	35 mm
Frame depth (mm)	18	**Popup command**	Yes, double
Dimensions of the product (mm)	218x1010x510 mm	**Popup command type**	Squared
		Dividing wall width	75 mm
Cutout dimension topmount (mm)	980x480 mm	**Drainer inclination**	2 °
		Gasket type	Sealing paste
Undermount cutout radius	5 mm	**No. of clips**	12
		Type of clips	Standard

Height from kitchen top	1 mm
Base unit size	80 cm
Tap hole	2

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

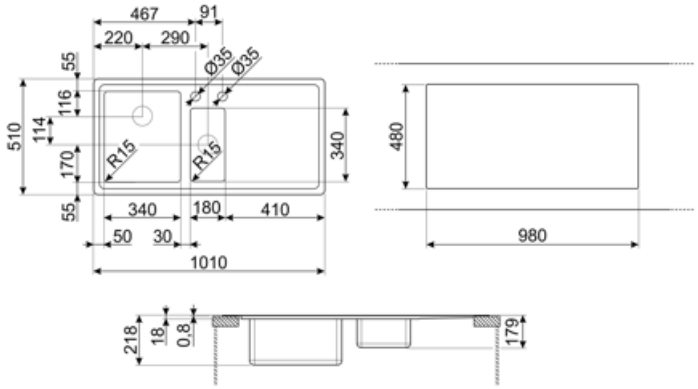

Compatible Accessories



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Flush-fitted installation: Models of sinks/hobs which are integrated flush with the tabletop of a kitchen unit.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Flat: Installation of product with flat edge.