

LFT116D

| | |
|--------------------|--------------------|
| Materiaal | Inox |
| Type spoelbak | Gesoldeerd/ Gelast |
| Aantal spoelbakken | 2 |
| Verlek | Verlek rechts |
| EAN-code | 8017709210373 |



Design



| | | | |
|------------------|--------------|---|--------------------------------------|
| Design | Universeel | Type inbouw | Vlak opbouw, Plat |
| Kleur | Inox | Logo | In reliëf |
| Afwerking | Scotch Brite | Geperforeerde opening voor kraan | 2 geperforeerde openingen voor kraan |
| Series | Mira | | |

| | Type spoelbak | Staaldikte spoelbak (mm) | Afmetingen spoelbak, BxHxD (mm) | Diepte spoelbak (mm) | Hoekradius spoelbak | Overloop spoelbak | Positie crepine | Afmeting crepine |
|-----------------|----------------|--------------------------|---------------------------------|----------------------|---------------------|-------------------|-----------------|------------------|
| Spoelbak rechts | Minimum radius | 1 | 340 x 400 x 200 | 200 | 15 | Ja, verzonken | Wandkap | 8,89 cm |
| Spoelbak links | Minimum radius | 1 | 340 x 400 x 200 | 200 | 15 | | Wandkap | 8,89 cm |

Technische specificaties



| | | | |
|--------------------------------|-----------------|---------------------------------|--------------|
| Frame dikte | 0,7 mm | Diameter kraangat | 35 mm |
| Diepte frame (mm) | 19 | Pop-up bediening | Ja, dubbel |
| Afmetingen product (mm) | 219x1170x510 mm | Type popup bediening | Rechthoekig |
| Afmetingen nis (mm) | 1140 x 480 mm | Inox tussenstuk spoelbak | 75 mm |
| Uitsnij radius | 5 mm | Inclinatie verlek | 2 ° |
| Hoogte vanaf werkblad | 1 mm | Type garnituur | Afdichtpasta |
| Afmeting inbouwmeubel | 90 cm | Aantal haken | 12 |

2 geperforeerde
openingen voor kraan en
systeem voor lediging

2


Type haken

Standaard

Meegeleverde accessoires

Accessoires voor
installatie inbegrepen

Crepine, Sifon met
vaatwasseraansluiting,
Montagehaken, Joints,
Automatische pop-up

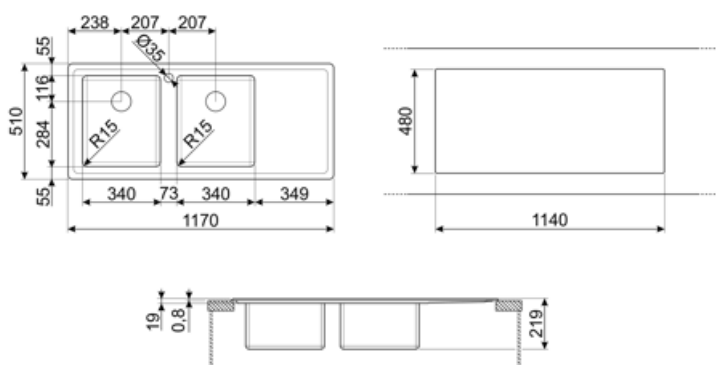

Compatible Accessories



CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



CB28QU

Single HPL chopping board for minimum radius, oak, measures 280 x 418 H 12 mm



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD075





Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary

- | | | | |
|--|--|---|---|
|  | Cupboard width required for sink installation. |  | Sink depth - depending on the model, the depth can be from 13 to 24,5. |
|  | Flat: Installation of product with flat edge. |  | Flush-fitted installation: Models of sinks/hobs which are integrated flush with the tabletop of a kitchen unit. |