LFT862

Sink material	Stainless steel
Type	Welded sink
No. of bowls	2
EAN code	8017709210434



Aesthetics

Aesthetic	Universale	**Building in type**	Flush fitted, Flat
Colour	Stainless steel	**Logo**	Embossed
Finishing	Scotch Brite	**Tap hole / precut tap hole**	2 Tapholes
Series	Mira		

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Minimum radius	1	340 x 400 x 200	200	15	Yes, flush fitted	Wall position	3.5"
LH Bowl	Minimum radius	1	340 x 400 x 200	200	15		Wall position	3.5"


Technical Features

Frame thickness	0.7 mm	**Tap hole diameter**	35 mm
Frame depth (mm)	15	**Popup command**	Yes, double
Dimensions of the product (mm)	215x870x510 mm	**Popup command type**	Squared
Cutout dimension topmount (mm)	840 x 480 mm	**Dividing wall width**	75 mm
Undermount cutout radius	5 mm	**Gasket type**	Sealing paste
		No. of clips	12
		Type of clips	Standard

Height from kitchen top	1 mm
Base unit size	90 cm
Tap hole	2

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

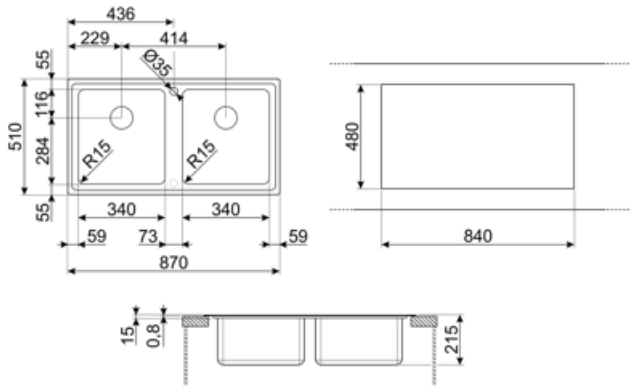

Compatible Accessories



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Flat: Installation of product with flat edge.



Flush-fitted installation: Models of sinks/hobs which are integrated flush with the tabletop of a kitchen unit.