

LGR116-2

Sink material Stainless steel
Type Welded sink

No. of bowls 2

Drainer Reversible

EAN code 8017709304195



Aesthetics



AestheticUniversaleBuilding in typeUltra-low profileColourStainless steelLogoEmbossed

Finishing Brushed Tap hole / precut tap 2 Tapholes

Series Alba hole

90 cm

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Traditional	0.7	300 x 400 x 210	210	80		Wall position	3.5"
LH Bowl	Traditional	0.7	450 x 400 x 210	210	80	Yes, traditional	Wall position	3.5"

Technical Features



Base unit size

Frame thickness 0.7 mm Popup command Yes, double Frame depth (mm) 13 Popup command type Round

Frame depth (mm) 13 Popup command type Round

Dimensions of the product (mm) Dividing wall width 30 mm

Drainer inclination 2°

Cutout dimension 1140 x 480 mm Gasket type Sealing paste

topmount (mm)

No. of clips

Height from kitchen top 6 mm Type of clips Standard



Tap hole

2


Tap hole diameter

35 mm

Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

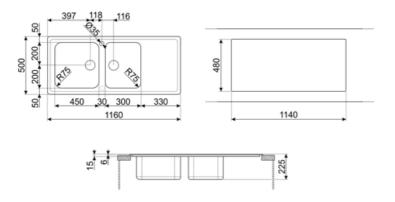



Compatible Accessories





Siphon double bowls sinks (dishwasher connection included)

CB28QU



Single HPL chopping board for miminum radius, oak, measures 280 x 418 H 12 mm

COL19H



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm

DB34



St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth

KITFD075



Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITSLTRND2



2 Bowls automatic Rondò pop up waste kit with rectangular overflow and round knob

CB25MN



Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe

COL19



St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm

COL36



St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm

KITFD050



Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

KITFD100



Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

STABMIX



Tap stabiliser



Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.