LLR102-2

Sink material	Stainless steel
Type	Welded sink
No. of bowls	1 + 1/2
Drainer	Reversible
EAN code	8017709200831



Aesthetics

Aesthetic	Universale	**Series**	Alba
Colour	Stainless steel	**Building in type**	Ultra-low profile
Finishing	Brushed	**Logo**	Embossed

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Half bowl	0.7	165 x 300 x 130	130	80		Centre of bowl	3.5"
LH Bowl	Traditional	0.7	340 x 400 x 210	210	80	Yes, traditional	Side bowl	3.5"


Technical Features

Frame thickness	0,7 mm	**Tap hole diameter**	35 mm
Frame depth (mm)	18	**Popup command**	Yes, double
Dimensions of the product (mm)	228x1000x500 mm	**Popup command type**	Round
		Dividing wall width	27,5 mm
Cutout dimension topmount (mm)	980 X 480 mm	**Drainer inclination**	2 °
Undermount cutout radius	15 mm	**Gasket type**	Sealing paste
		No. of clips	10
Height from kitchen top	6 mm	**Type of clips**	Standard
Base unit size	60 cm		

Tap hole	2

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

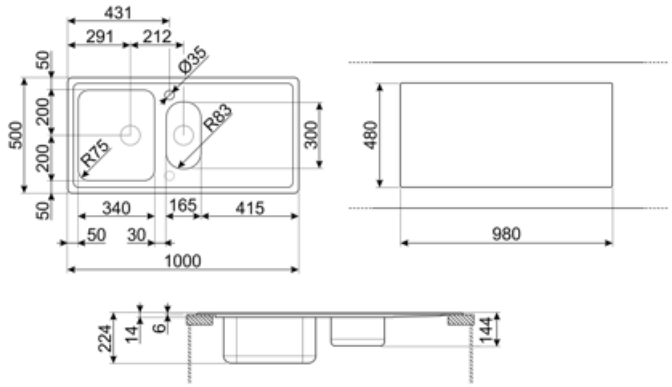

Compatible Accessories



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.



Sink depth - depending on the model, the depth can be from13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.