

LLR102-2

Sink materialStainless steelTypeWelded sinkNo. of bowls1 + 1/2DrainerReversibleEAN code8017709200831



Aesthetics



Aesthetic Universale Series Alba

ColourStainless steelBuilding in typeUltra-low profileFinishingBrushedLogoEmbossed

Bowl Bowl Bowl Radius corner Bowl Overflow Strainer Strainer thickness dimensions, depth right bowl type RH dimension LH bowl position WxDxH (mm) (mm) (mm) (mm) RHCentre of Half bowl 0.7 165 x 300 x 130 130 80 3.5" Bowl bowl LH Yes, Side Traditional 0.7 340 x 400 x 210 210 80 3.5" Bowl traditional bowl

Technical Features



Frame thickness 0,7 mm Tap hole diameter 35 mm
Frame depth (mm) 18 Popup command Yes, double
Dimensions of the 228x1000x500 mm Popup command type Round
product (mm) Dividing wall width 27,5 mm

Cutout dimension 980 X 480 mm Drainer inclination 2 °

topmount (mm)

Undermount cutout15 mmGasket typeSealing pasteradiusNo. of clips10

Height from kitchen top 6 mm Type of clips Standard
Base unit size 60 cm




Tap hole

2

Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Automatic pop - up with roudn rotary control

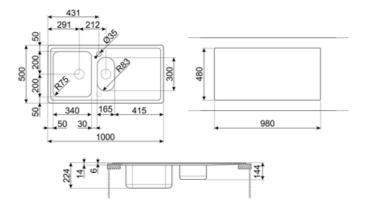



Compatible Accessories

3713



Siphon double bowls sinks (dishwasher connection included)

CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm, dishwasher safe





Single wooden chopping board to fit STD radius 340 x 400 mm bowl



COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITSLTRND2

2 Bowls automatic Rondò pop up waste kit with rectangular overflow and round knob



STABMIX

Tap stabiliser



Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.