

LPR102

Sink material Stainless steel Type Welded sink No. of bowls 1 + 1/2Drainer Reversible

EAN code 8017709304683



Aesthetics



Universale Building in type Ultra-low profile **Aesthetic** Colour Stainless steel Logo **Embossed Finishing** Brushed Tap hole / precut tap 2 Tapholes hole

Series Aurora

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow LH bowl	Strainer position	Strainer dimension
RH Bowl	Half bowl	0.7	165 x 300 x 130	130	80		Centre of bowl	3.5"
LH Bowl	Traditional	0.6	340 x 400 x 180	180	80	Yes, traditional	Side bowl	3.5"

Technical Features



Frame thickness 0,6 mm Tap hole diameter 35 mm Frame depth (mm) 13 Dividing wall width 30 mm

2 ° Dimensions of the 193x1000x500 mm **Drainer inclination** product (mm) Gasket type Sealing paste

Cutout dimension 980 X 480 mm

No. of clips 10 topmount (mm)

Type of clips Standard Height from kitchen top 6 mm

Base unit size 60 cm

SMEG SPA 12/12/2025




Tap hole

2

Accessories included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips, Gasket, Blanking cap

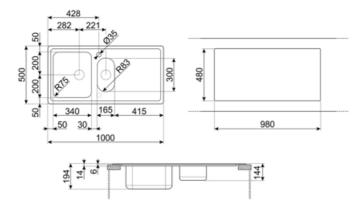

SMEG SPA 12/12/2025



Compatible Accessories

3713




Siphon double bowls sinks (dishwasher connection included)

CB25MN

Single HPE chopping board to fit minimum radius bowls, black matt, measures 250 x 410 H 12 mm. dishwasher safe







COL19

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 26 mm



COL19H

St/Steel colander to fit MINIMUM radius mm bowl, measures 200 x 410 x 100 mm



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITDS

Soap dispenser chrome finishing with round knob



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITSLTRND2

2 Bowls automatic Rondò pop up waste kit with rectangular overflow and round knob



STABMIX

Tap stabiliser

SMEG SPA 12/12/2025



Symbols glossary



Cupboard width required for sink installation.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.

SMEG SPA 12/12/2025