LPR102

Materiaal	Inox
Type spoelbak	Gesoldeerd/ Gelast
Aantal spoelbakken	1 + 1/2
Verlek	Omkeerbaar
EAN-code	8017709304683



Design

Design	Universeel	**Type inbouw**	Vlak opbouw
Kleur	Inox	**Logo**	In reliëf
Afwerking	Geborsteld inox	**Geperforeerde opening voor kraan**	2 geperforeerde openingen voor kraan
Series	Aurora		

	Type spoelbak	Staaldikte spoelbak (mm)	Afmetingen spoelbak, BxHxD (mm)	Diepte spoelbak (mm)	Hoekradius spoelbak	Overloop spoelbak L	Positie crepine	Afmeting crepine
Spoelbak rechts	Spoelbakje	0.7	165 x 300 x 130	130	80		Centrale spoelbak	8,89 cm
Spoelbak links	Traditioneel	0.6	340 x 400 x 180	180	80	Ja, traditioneel	Zijkant spoelbak	8,89 cm


Technische specificaties

Frame dikte	0.6 mm	**Diameter kraangat**	35 mm
Diepte frame (mm)	13	**Inox tussenstuk spoelbak**	30 mm
Afmetingen product (mm)	193x1000x500 mm	**Inclinatie verlek**	2 °
Afmetingen nis (mm)	980 X 480 mm	**Type garnituur**	Afdichtpasta
Hoogte vanaf werkblad	6 mm	**Aantal haken**	10
Afmeting inbouwmeubel	60 cm	**Typpe haken**	Standaard

2 geperforeerde openingen voor kraan en systeem voor lediging	2

Meegeleverde accessoires

Accessoires voor installatie inbegrepen	Crepine, Sifon met vaatwasseraansluiting, Montagehaken, Joints, Blanking cap

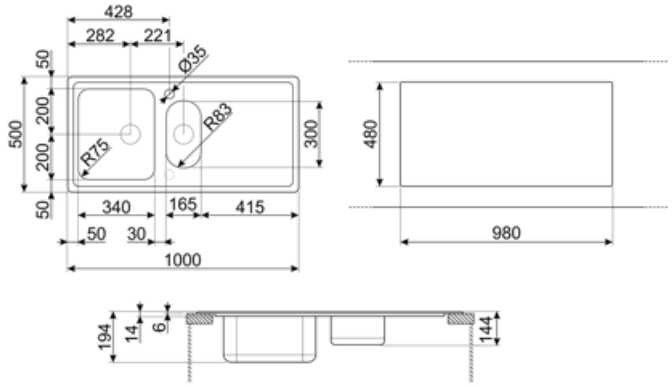

Compatible Accessories



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITDS

Soap dispenser chrome finishing with round knob



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary



Breedte van het inbouwmeubel voor installatie spoelbak



Sink depth - depending on the model, the depth can be from13 to 24,5.





Sink depth - depending on the model, the depth can be from13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.