

LPR102

Materiaal	Inox
Type spoelbak	Gesoldeerd/ Gelast
Aantal spoelbakken	1 + 1/2
Verlek	Omkeerbaar
EAN-code	8017709304683



Design



Design	Universeel	Type inbouw	Vlak opbouw
Kleur	Inox	Logo	In reliëf
Afwerking	Geborsteld inox	Geperforeerde opening voor kraan	2 geperforeerde openingen voor kraan
Series	Aurora		

	Type spoelbak	Staaldikte spoelbak (mm)	Afmetingen spoelbak, BxHxD (mm)	Diepte spoelbak (mm)	Hoekradius spoelbak	Overloop spoelbak L	Positie crepine	Afmeting crepine
Spoelbak rechts	Spoelbakje	0.7	165 x 300 x 130	130	80		Centrale spoelbak	8,89 cm
Spoelbak links	Traditioneel	0.6	340 x 400 x 180	180	80	Ja, traditioneel	Zijkant spoelbak	8,89 cm

Technische specificaties




Frame dikte	0,6 mm	Diameter kraangat	35 mm
Diepte frame (mm)	13	Inox tussenstuk spoelbak	30 mm
Afmetingen product (mm)	193x1000x500 mm	Inclinatie verlek	2 °
Afmetingen nis (mm)	980 X 480 mm	Type garnituur	Afdichtpasta
Hoogte vanaf werkblad	6 mm	Aantal haken	10
Afmeting inbouwmeubel	60 cm	Type haken	Standaard

2 geperforeerde 2
openingen voor kraan en
systeem voor lediging

Meegeleverde accessoires

Accessoires voor
installatie inbegrepen

Crepine, Sifon met
vaatwasseraansluiting,
Montagehaken, joints,
Blanking cap

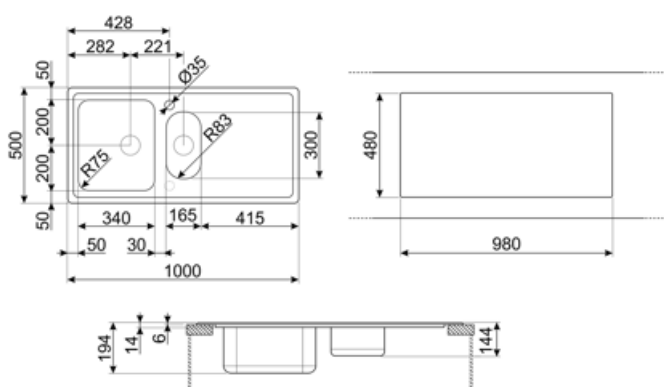

Compatible Accessories



3713

Siphon double bowls sinks (dishwasher connection included)



DB34

St/steel drain basket to fit STD radius 340 x 400 bowl, 180 mm depth



KITDS

Soap dispenser chrome finishing with round knob



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



STABMIX

Tap stabiliser

Symbols glossary



Breedte van het inbouwmeubel voor installatie spoelbak



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Sink depth - depending on the model, the depth can be from 13 to 24,5.



Ultra-low profile: Installation of product with flat edge - height of 1 mm.

