

LSA6444B2

| | |
|---------------------|---------------|
| Familie | Vaatwasser |
| Commerciële breedte | 60 cm |
| Nishoogte | 85 cm |
| Installatie | Vrijstaand |
| Aantal korven | 2 |
| Motor | Eenfasig |
| EAN-code | 8017709166557 |



Programs



| | | | |
|--------------------|--|---------------------|----|
| Aantal programma's | 7 standaard + 6 Quick Time programma's | Delicate vaat, snel | Ja |
| Wastemperatuur | 38, 45, 50, 65, 70 °C | Dagelijks snel | Ja |
| Weken | Ja | Normaal snel | Ja |
| Snel 27' | Ja | Auto 40-50 | Ja |
| Glas | Ja | Auto 60-70 | Ja |
| Eco | Ja | Sterk en snel | Ja |
| Delicate vaat | Ja | Super | Ja |
| ECO Quick | Ja | | |

Opties



| | | | |
|---|--|--------------------------------|----|
| EnerSave optie | Ja | FlexiTabs optie | Ja |
| Delay timer optie | Tot 24 uur, i.c.m. automatisch spoelen | Quick Time option | Ja |
| FlexiZone ½ (halve beladingsmogelijkheid) | Ja | Hyclean optie (Intensief 70°C) | Ja |

Korven



| | |
|-----------------------|-------|
| Kleur korven | Grijs |
| Kleur korfcomponenten | Grijs |

| | | | |
|--|------------------------|--|-------------------------|
| Handgreep | Op onder- en bovenkorf | Maximum afmetingen bord dat in bovenste korf kan worden geladen | 23,5 cm |
| Bovenkorf | Met vaste rekken | Onderkorf | Met 4 opvouwbare rekken |
| In hoogte verstelbare bovenkorf | 3 niveaus | Onderkorf met anti-drup inserts | Ja |
| | | Maximum afmetingen bord dat in onderste korf kan worden geladen | 30,0 cm |
| | | Bestekmandje | 13 couverts, schuivend |


Technische specificaties



| | | | |
|---------------------------------------|--|---|---|
| Breedte product | 598 mm | Aquatest sensor | Ja |
| Diepte product | 600 mm | Overstroombeveiliging | Total Acquastop |
| Type display | 4 cijfers | Watertoevoer | Enkel; koud en warm water tot 60°C - energiebesparing tot 35% |
| Hoogte product | 848 mm | Maximale waterhardheid | 100°fH;58°dH |
| Bediening | Elektronisch | Droogsysteem | Natural condenser drying, with EnerSave automatic door opening system at the end of the cycle |
| Display | Instelling Delay timer, Programma duur indicator, Resttijd indicatie | Materiaal kuip | Roestvrij staal |
| Grafische weergave programma's | Symbolen | Filter | Roestvrij staal |
| Aan/uit indicator | Ja | Verborgen verwarmingselement | Ja |
| Zout indicator | Indicator (lampje) | Scharnieren | Zelfbalancerend met vast steunpunt |
| Glansspoelmiddel indicator | Indicator (lampje) | Verstelbare voetjes | Alleen voor niveau aanpassing |
| Indicator voortgang programma | Ja | Geluidsisolatie niveau | Top |
| Indicator einde cyclus | Op display, met akoestisch signaal | Back cover | Yes, with covered counterweight |
| Wassysteem | Orbital | Diepte vaatwasser met open deur (mm) | 1168 |
| Derde sproeiarm | Enkel | Verwijderbare bovenkant | Ja, met optionele KIT |
| Waterontkalker | Elektronisch instelbaar | | |


Elektrische aansluiting

| | | | |
|-----------------------|--------------|-----------------------------|--------------|
| Stekker | (F;E) Schuko | Frequentie | 50 Hz |
| Aansluitwaarde | 1800 W | Type aansluiting | Single-phase |
| Stroom | 10 A | Lengte voedingskabel | 140 cm |
| Spanning | 220-240 V | | |

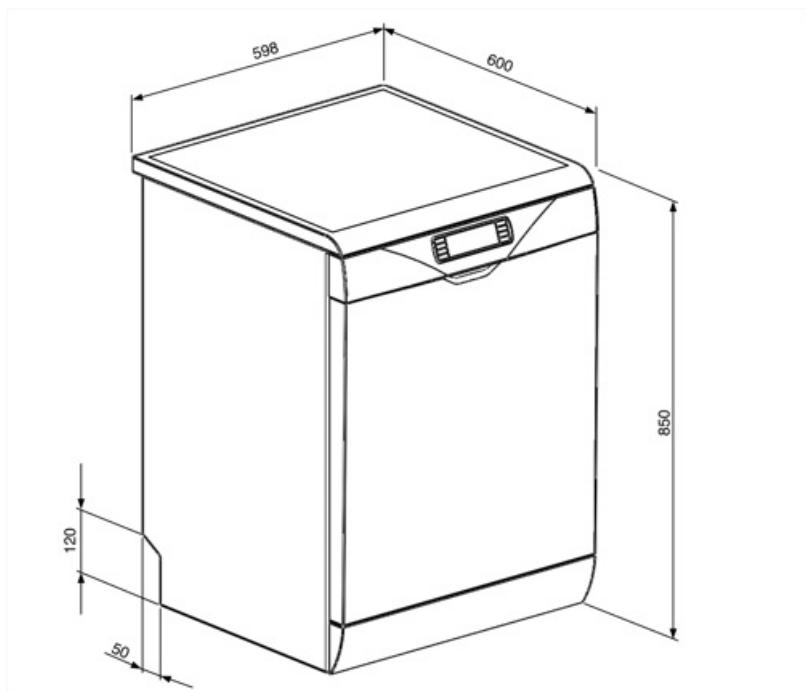


Accessoires niet inbegrepen

KITGH



Kit glazen houder. Deze moet op de eerste mand worden gemonteerd, maar alleen als er inklapbare rekken zijn

KITINC



KITPLV2



Kit verlengstuk voor vaatwasser en wasmachine: lengte 2 mtr.

Symbols glossary (TT)

| | | | |
|--|---|---|--|
|  A+++ | A+++: Appliances with this symbol can reduce energy consumption by a further 30% from the standard A energy rating. |  AQUATEST | Aquatest meet de helderheid van het water tijdens een automatisch programma en zorgt automatisch voor een minimaal verbruik van water en energie |
|  DRYING | To improve the drying of dishes without leaving stains. |  | Vertragingstimer: De uitgestelde timer kan de start van het programma tot 24 uur uitstellen. |
|  FLEXIZONE | Ideal for multi-function detergents, this option allows washing to be optimised, with full benefits from the combined-action tablets. When this option is activated, any salt and rinse aid is used. |  | FlexiZone: The $\frac{1}{2}$ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed. |
|  HYCLEAN | Hyclean: When the HYCLEAN option is selected, the dishwasher performs a final 10 minute rinse at a high temperature of 70°C, eliminating virtually all bacteria to achieve the highest possible standards of cleanliness. The Hyclean option can be selected with almost all cycles at temperatures above 50°C. |  44 dB | Noise Level: Excellent insulation and special devices keep noise to a minimum. |
|  ORBITAL WASH | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |  AUTO 40°-50° | Auto 40°- 50°: The auto programme regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required. |
|  AUTO 60°-70° | Auto 60° - 70°: The auto program regulates the length of a cycle depending on the need for a pre-wash and the number of rinses required. |  | Daily Quick: The daily program is suitable for quick daily washing of dishes. |
|  DELICATE | Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled. |  | Delicate Quick: Program Delicate Quick is suitable for quick washing of delicate dishes. |
|  ECO 50° | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |  ECO | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |
|  NORMAL QUICK | Normal Quick: Program Normal Quick is suitable for quick washing of mixed dishes, for everyday use. |  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |
|  PRG_STRONG_72dpi | |  STRONG & FAST | Strong&Fast: This special programme takes less than 1 hour to eliminate the most stubborn dirt and dried on residues. |
|  13 PLACE SETTINGS | 13 place settings: Number of place settings. |  TOTAL ACQUASTOP | Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary. |
|  WATERSAVE | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. | | |