

LSP382CX





Product Family Dishwashers Commercial width 60 cm Commercial height 82 cm

Installation Under counter built-in

N° baskets 3, Flexi Motor Inverter 2.0 EAN code 8017709307332



With 2 foldable racks

Programs











N. of programmes 5 Mix Yes 50, 65, 70 °C Washing temperatures Intense Yes Soak Yes 1/2 load Yes **ECO** Yes

Options





Delay timer option 3-6-9 hours Extra dry option Yes

Baskets



Basket colour Grey Largest loadable dish in 19,0 cm

upper basket **Basket components** Grey

Lower Basket colour

Handle In plastic on upper and Lower basket with anti- Yes

lower basket drip inserts

Upper Basket With central fixed racks Largest loadable dish in 30,0 cm

lower basket Glass holder

Height adjustment of On three levels (5 cm) Colour Inner Green the upper basket Components

Technical Features







Width (mm) 598 mm 570 mm Depth (mm) Product Height (mm) 818 mm Controls Electronic Programme graphics Symbols On/off indicator Yes

Salt light indicator Light Rinse aid indicator Light

Led on display, with End of cycle indicator acoustic signal

Orbital Washing system Third spray arm Single

Water softener With electronic setting Flood protection system **Total Acquastop**

Water supply Single; cold/hot water max. 60°C - energysave with hot

water up to 35%

Max water hardness

Natural condenser drying, Drying system with Dry Assist + automatic

door opening system at the end of the cycle

Steam protection In plastic Tub material Filter

Concealed heating element

Hinges

Min. and max plinth

height

Adjustable feet

Back cover Depth of dishwasher with open door (mm)

Back feet adjustable

from front Top cover

100°fH;58°dH

Stainless steel Stainless steel

Yes

Self balancing with fixed

hinges 100 - 170 mm

7 cm, from 820 to 890 mm

Yes 1146

Yes

In plastic

Performance / Energy Label - Reg. 2019









Energy Efficiency Class Energy consumption

[per 100 cycles, based on the eco programme] Rated capacity (ps)

Water consumption [per 12,0 litres

cycle]

73 KWh

13

Programme duration Airborne acoustical

noise emissions Airborne acoustical noise emission class

Energy efficiency Index

(EEI)

4:10 h:min

48 dB(A) re 1 pW

C

43,8


Electrical Connection

Plug (F;E) Schuko 1800 W Connected power Current 10 A 220-240 V Voltage

Frequency (Hz) Type of connection Power supply cable length

50 Hz Single-phase 140 cm



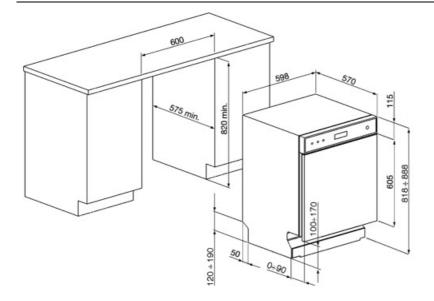



Compatible Accessories

KITGH



Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



Symbols glossary



To improve the drying of dishes without leaving stains.



Energy efficiency class C



82 cm high



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Ultraclean: The Ultraclean option performs a final rinse at a high temperature of 70°c eliminating virtually all bacteria.



13 place settings: Number of place settings.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



EXTRA DRY This option adds a hot rinse cycle that ensures improved drying.



The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.



Benefit (TT)

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.