LSPU8212S



Product family	Dishwasher
Width	24"
Commercial height	82 cm
Installation	Under-Counter
N° baskets	2
EAN code	8017709303709

Programs

Number of programs	5	**Delicates**	Yes
Washing temperatures	45, 50, 65, 70 °F	**Normal**	Yes
Mix	Yes	**Pots & Pans**	Yes
Daily (half load)	Yes		

Options

Professional option	**Intensive washing zone option**

Baskets

Basket components finish	Gray	**Lower basket**	Fixed racks
Upper basket	Central fixed racks	**Lower basket with anti-drip inserts**	Yes
Glass holder	Yes	**Largest loadable dish in lower basket**	30,0 inches
Upper basket height adjustment	On two height levels	**Colour Inner Components**	Blue
Largest loadable dish in upper basket	25,0 inches	**Cutlery basket**	Yes

Technical Features


Width	23 9/16 "
Depth	22 7/16 "
Height	32 3/16 "
Program symbols	Symbols
On/off indicator	Yes
Rinse aid indicator	Light
End-of-cycle indicator	Light on display, with acoustic signal
Auto switch-off	Yes
Washing system	Standard
Third spray arm	Single
Flood protection system	Single Aquastop
Max water hardness	100°fH;58°dH

Drying system	Natural condensation drying
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self-balancing with fixed hinges
Min. and max plinth height	3.9" - 6.6"
Adjustable feet	2 3/4", from 32 1/4" to 35"
Additional gaskets	Yes
Back cover	Yes
Depth of dishwasher with open door (mm)	1146 mm
Top cover	Metal sheet
Energy Star	Yes

Electrical Connection

Connected power	1800 W
Current	10 A
Voltage	110-120 V
Frequency	60 Hz

Connection type	Single-phase
Power Cord Length	140 "
Plug	(A) USA & Mexico

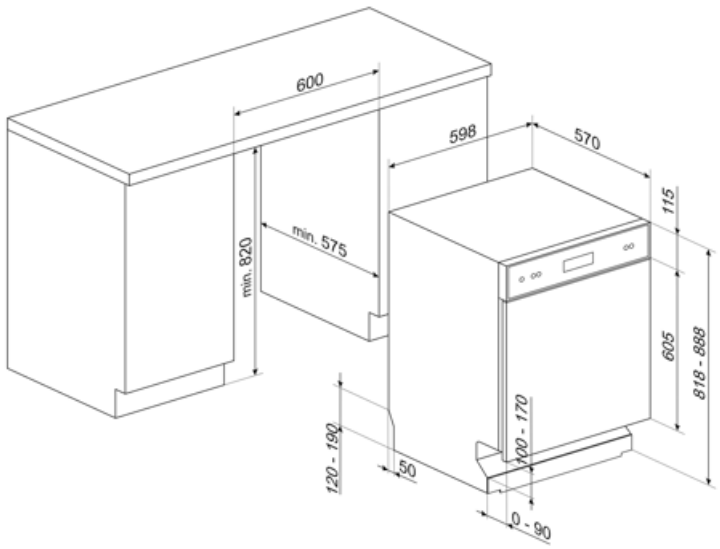

Compatible Accessories

KITPL60FABB

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABX

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPL60FABN

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2

Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



COMM_HEIGHT_82_72dpi



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



The symbols show the number of plate settings of the dishwasher.