


# LSPU8612S



Product Family	Dishwashers
Commercial width	60 cm
Commercial height	86 cm
Installation	Under counter built-in
N° baskets	2
Motor	Single phase
EAN code	8017709303716

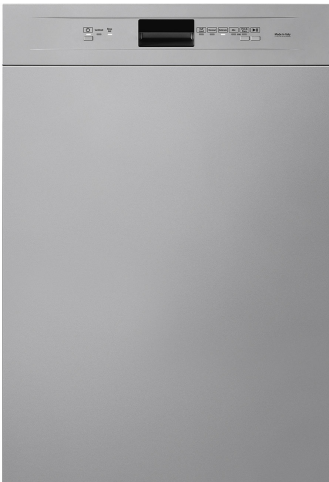

## Programs / Functions



N. of programmes	5	Delicate	Yes
Washing temperatures	45, 50, 65, 70 °F	Normal	Yes
Mix	Yes	Pots & Pans	Yes
1/2 load	Yes		

## Baskets



Basket components colour	Grey	Lower Basket	With fixed racks
Upper Basket	With central fixed racks	Lower basket with anti-drip inserts	Yes
Glass holder	Yes	Largest loadable dish in lower basket	35,0 inches
Height adjustment of the upper basket	On two levels, by extraction	Colour Inner Components	Blue
Largest loadable dish in upper basket	18,0 inches	Cutlery basket	Yes

## Technical Features




Width (mm)	23 9/16 "	Drying system	Natural condenser drying
Depth (mm)	22 7/16 "	Tube material	Stainless steel
Product Height (mm)	32 3/16 "	Filter	Stainless steel
Programme graphics	Symbols		
On/off indicator	Yes		

<b>Rinse aid indicator</b>	Light	<b>Concealed heating element</b>	Yes
<b>End of cycle indicator</b>	Led on display, with acoustic signal	<b>Hinges</b>	Self balancing with fixed hinges
<b>Washing system</b>	Standard	<b>Min. and max plinth height</b>	98 - 168 mm
<b>Third spray arm</b>	Single	<b>Adjustable feet</b>	7cm, from 860 to 930 mm
<b>Flood protection system</b>	Single Acquastop	<b>Additional gaskets</b>	Yes
<b>Max water hardness</b>	100°fH;58°dH	<b>Back cover</b>	Yes
		<b>Depth of dishwasher with open door (mm)</b>	1146
		<b>Top cover</b>	Metallic sheet

## Electrical Connection

<b>Plug</b>	(A) USA e Messico	<b>Frequency (Hz)</b>	60 Hz
<b>Connected power</b>	1800 W	<b>Type of connection</b>	Single-phase
<b>Current</b>	10 A	<b>Power supply cable length</b>	140 "
<b>Voltage</b>	110-120 V		

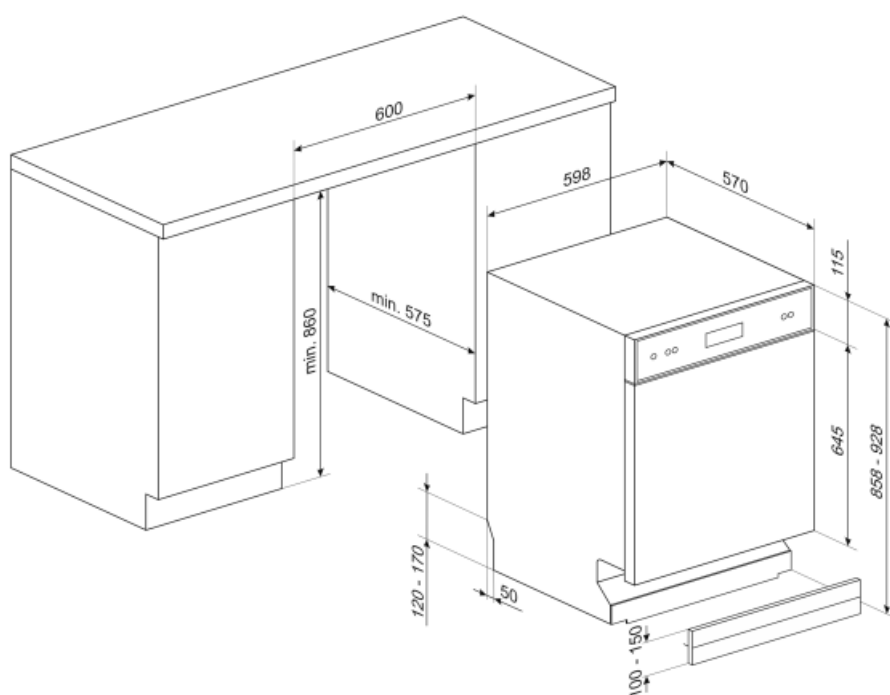

---

## Not included accessories

---

### KITPL60FABB



Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPL60FABN



Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPL60FABX









Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.

### KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary (TT)

	Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance.		To improve the drying of dishes without leaving stains.
	86 cm high		Noise Level: Excellent insulation and special devices keep noise to a minimum.
	1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.		Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.
	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.		13 place settings: Number of place settings.