# LSPU8612S



| | |
|---|---|
| **Product family** | Dishwasher |
| **Width** | 24" |
| **Commercial height** | 86 cm |
| **Installation** | Under-Counter |
| **N° baskets** | 2 |
| **EAN code** | 8017709303716 |

## Programs

| | | | |
|---|---|---|---|
| **Number of programs** | 5 | **Delicates** | Yes |
| **Washing temperatures** | 45, 50, 65, 70 °F | **Normal** | Yes |
| **Mix** | Yes | **Pots & Pans** | Yes |
| **Daily (half load)** | Yes | | |

## Options

| | |
|---|---|
| **Professional option** | **Intensive washing zone option** |

## Baskets

| | | | |
|---|---|---|---|
| **Basket components finish** | Gray | **Lower basket** | Fixed racks |
| **Upper basket** | Central fixed racks | **Lower basket with anti-drip inserts** | Yes |
| **Glass holder** | Yes | **Largest loadable dish in lower basket** | 35,0 inches |
| **Upper basket height adjustment** | On two height levels | **Colour Inner Components** | Blue |
| **Largest loadable dish in upper basket** | 18,0 inches | **Cutlery basket** | Yes |

## Technical Features


| | |
|---|---|
| **Width** | 23 9/16 " |
| **Depth** | 22 7/16 " |
| **Height** | 32 3/16 " |
| **Program symbols** | Symbols |
| **On/off indicator** | Yes |
| **Rinse aid indicator** | Light |
| **End-of-cycle indicator** | Light on display, with acoustic signal |
| **Auto switch-off** | Yes |
| **Washing system** | Standard |
| **Third spray arm** | Single |
| **Flood protection system** | Single Aquastop |
| **Max water hardness** | 100°fH;58°dH |

| | |
|---|---|
| **Drying system** | Natural condensation drying |
| **Tub material** | Stainless steel |
| **Filter** | Stainless steel |
| **Concealed heating element** | Yes |
| **Hinges** | Self-balancing with fixed hinges |
| **Min. and max plinth height** | 3.9" - 6.6" |
| **Adjustable feet** | 2 3/4", from 33 7/8" to 36 5/8" |
| **Additional gaskets** | Yes |
| **Back cover** | Yes |
| **Depth of dishwasher with open door (mm)** | 1146 mm |
| **Top cover** | Metal sheet |
| **Energy Star** | Yes |

## Electrical Connection

| | |
|---|---|
| **Connected power** | 1800 W |
| **Current** | 10 A |
| **Voltage** | 110-120 V |
| **Frequency** | 60 Hz |

| | |
|---|---|
| **Connection type** | Single-phase |
| **Power Cord Length** | 140 " |
| **Plug** | (A) USA & Mexico |

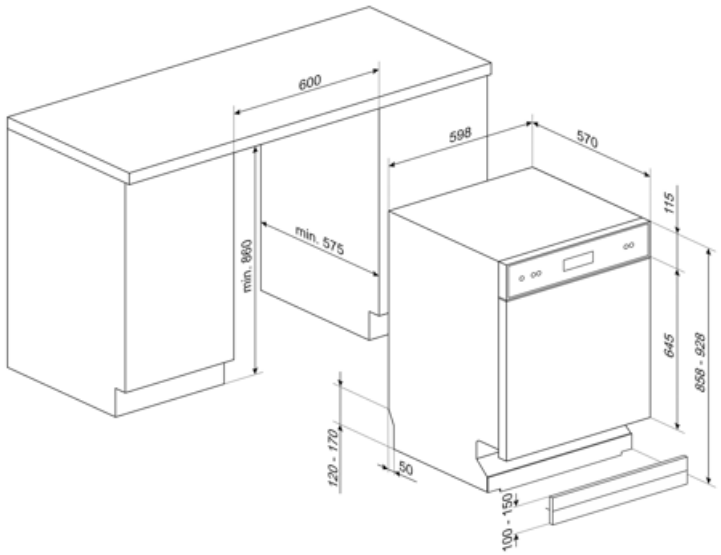

## Compatible Accessories



**KITPL60FABB**

Toekick Kit in White colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



**KITPL60FABX**

Toekick Kit in Stainless Steel with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



**KITPL60FABN**

Toekick Kit in Black colour with adjustable height. Can be fitted over all the fully integrated and underbench models with Fixed Fulcrum. Can be installed also on the models with variable fulcrum or flexifit hinges.



**KITPLV2**

Kit extension for dishwasher and washing machine: lenght mt. 2

## Symbols glossary



Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necesary to prevent an accidental leakage of water inside the appliance.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.




COMM_HEIGHT_86_72dpi




Noise Level: Excellent insulation and special devices keep noise to a minimum.




1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.




Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.




Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



The symbols show the number of plate settings of the dishwasher.