

LSPU8643BL

86 cm

Product Family Commercial width Commercial height Installation N° baskets EAN code Dishwashers 60 cm 86 cm Under counter built-in 3, FlexiDuo 8017709303723



Programs

65	<u>250°</u>		
N. of programmes	10+1	Delicate	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	Normal	Yes
Soak	Yes	Crystal & China	Yes
Express 27'	Yes	Eco express	Yes
Mix	Yes	Express 60'	Yes
Self clean	Yes	Pots & Pans	Yes
Sterilise	Yes		

Options



Dry Assist option Delay timer option Yes Up to 24 hours 1/2 load FlexiZoneYesoptionSpecial programs optionYes

Baskets

Basket components colour	Grey
Upper Basket	With
Glass holder	Yes
Height adjustment of the upper basket	On th

With 1 foldable rack Yes On three levels (5 cm) Lower BasketWith 2 foldable racksLower basket with anti-
drip insertsYesLargest loadable dish in
lower basket35,0 inches



Sliding Guides Extra Yes Glide Largest loadable dish in 18,0 inches upper basket Colour Inner Components Cutlery basket Blue

Yes

Technical Features


LED CON

DISPLAY SYSTEM ACCURITOR			
Width (mm)	23 9/16 "	Flood protection system	Total Acquastop
Depth (mm)	22 7/16 "	Max water hardness	100°fH;58°dH
Display type Product Height (mm) Display	duct Height (mm) 32 3/16 "		Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
time indicator, T indication	time indicator, Time to end indication	Tub material	Stainless steel
Programme graphics	Symbols	Filter	Stainless steel
On/off indicator	off indicatorYeslight indicatorLighte aid indicatorLighte aid indicatorYesof cycle indicatorOn display, with acoustic signalshing systemOrbitald spray armSingle	Concealed heating element	Yes
Rinse aid indicator		Hinges	Self balancing with variable hinges
Progress indicator End of cycle indicator		Min. and max plinth height	98 - 168 mm
Washing system Third spray arm Water softener		Adjustable feet Additional gaskets Back cover	7cm, from 860 to 930 mm Yes Yes
		Depth of dishwasher with open door (mm)	1146
		Top cover	Metallic sheet

Electrical Connection

Plug	(A) USA e Messico	Frequency (Hz)	60 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable	140 "
Voltage	110-120 V	length	



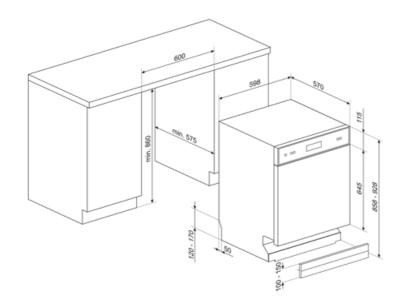



Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks

KITPL60N



Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPLV2



Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

KITPL60X



Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



Symbols glossary

Š	To improve the drying of dishes without leaving stains.	86 cm	86 cm high
Ŷ	Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.	LEO	LED display: to show programmes, functions and options selected and the time to the end of the cycle.
F	The Dry Assist option ensures optimal drying of the dishes by automatically opening the door at the end of the wash cycle. Reducing the rinse temperat		FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.
×	FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.		The ExtraGlide guides system makes the second basket run even smoother and softer. It facilitates movement even when fully loaded, and thanks to the increased excursion, facilitates the insertion of dishes into the basket.
48 dB	Noise Level: Excellent insulation and special devices keep noise to a minimum.	CORDITAL ORBITAL STSTEM	Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.
	Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.	65°)))	Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.
灬	Soak programme: The soak programme provides a rinse to prevent dirt from drying.	27min	Express 27': The Express 27' programme is a quick wash cycle, at low temperatures, for lightly soiled dishes.
iŌi	13 place settings: Number of place settings.		Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.
	Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.	\$	Allows you to enable additional programs when selected together with any wash cycle. After having selected the required wash cycle, press the button (
275°	STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.		



Benefit (TT)

FlexiDuo

The flexible third basket provides additional space, adapting to the load to accommodate various types of dishes, ensuring optimal organization and efficient use of interior capacity

The third FlexiDuo basket consists of two separate sections that can be handled independently of each other, stacked and/or removed, offering loading flexibility for every need. Depending on the arrangement, it allows cups, tall glasses, bulky utensils and pots and pans to be placed in the upper basket.

Orbital Wash System

Even water distribution, deep cleaning and low noise thanks to the dual rotating spray arms

Orbital washing system, which, thanks to its double arm, its 7 water exit points and thanks to overlapping and simultaneous rotations and 40 rotations per minute, allows ample coverage of the tank area, thus guaranteeing optimal results in any basket-loading configuration.

Extra Glide Telescopic Guides

Smoother and more stable loading and unloading operations

Extra Glide telescopic guides ensure smooth and safe extraction of the upper basket, even with heavy loads. The telescopic design ensures smooth, stable and silent movement, improving ergonomics and convenience. Ideal for optimising space and ease of use, they combine durability and comfort in every washing operation.