LSPU8653X



Product family	Dishwasher
Width	24"
Commercial height	86 cm
Installation	Under-Counter
N° baskets	3, FlexiDuo
EAN code	8017709303754

Programs

Number of programs	10+1	**Sterilize**	Yes
Washing temperatures	38, 45, 50, 55, 65, 70, 75 °F	**Daily (half load)**	Yes
Soak	Yes	**Delicates**	Yes
Express	Yes	**Auto**	Yes
Mix	Yes	**Crystal & China**	Yes
Intensive		**Eco express**	Yes
Self Clean	Yes	**Pots & Pans**	Yes

Options


Dry Assist option	Yes	**FlexiZone half-load option**	Yes
Delay start	Up to 24 hours	**Special programs option**	Yes

Baskets

Basket components finish	Gray	**Lower basket**	With 4 foldable racks
Upper basket	3 foldable racks	**Lower basket with anti-drip inserts**	Yes
Upper basket height adjustment	On 3 levels	**Largest loadable dish in lower basket**	35,0 inches

Sliding Guides Extra Glide	Yes	**Colour Inner Components**	Blue
Largest loadable dish in upper basket	18,0 inches	**Cutlery basket**	Yes


Technical Features




Width	23 9/16 "	**Flood protection system**	Total Aquastop
Depth	22 7/16 "	**Max water hardness**	100°fH;58°dH
Display type	OLED	**Drying system**	Dry Assist
Height	32 3/16 "	**Internal lighting**	White LED
Display	Delay start, Program progress indicator, Time-to-end indicator	**Tub material**	Stainless steel
		Filter	Stainless steel
		Concealed heating element	Yes
Program symbols	Symbols	**Hinges**	Self-balancing with variable hinges
On/off indicator	Yes		
Salt indicator	Light		
Rinse aid indicator	Light	**Min. and max plinth height**	3.9" - 6.6"
Program progress indicator	Yes	**Adjustable feet**	2 3/4", from 33 7/8" to 36 5/8"
End-of-cycle indicator	On display, with acoustic signal	**Additional gaskets**	Yes
		Back cover	Yes
Auto switch-off	Yes	**Depth of dishwasher with open door (mm)**	1146 mm
Washing system	Planetarium		
Third spray arm	Single	**Top cover**	Metal sheet
Water softener	With electronic setting	**Energy Star**	Yes
Turbidity sensor Aquatest	Yes		

Electrical Connection

Connected power	1800 W	**Connection type**	Single-phase
Current	10 A	**Power Cord Length**	140 "
Voltage	110-120 V	**Plug**	(A) USA & Mexico
Frequency	60 Hz		

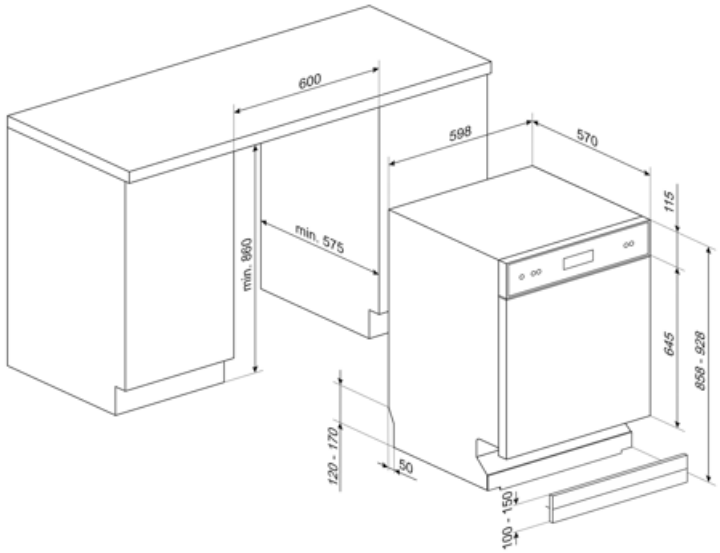
600
598
570
115
min. 575
min. 960
645
858 - 928
120 - 170
50
100 - 150

Compatible Accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITPL60N

Toekick Kit in Black colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



KITPL60B

Toekick Kit in White colour with adjustable height and deepness. Can be installed over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.



KITPL60X

Toekick Kit in Stainless Steel with adjustable height and deepness. Can be fitted over all the fully integrated and underbench models with variable fulcrum or flexifit hinges.

Symbols glossary



Aquatest measures the clarity of the water during an auto program, and automatically ensures the minimum consumption of water and energy.



COMM_HEIGHT_86_72dpi



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



FlexiDuo: The FlexiDuo 3rd cutlery basket allows you to arrange cutlery or small cups, ladles, or bulky utensils however you like: it consists of two separate and moveable modules.



The new ExtraGlide guide system, available on top of the range models, makes the second basket even smoother and softer. In fact, it facilitates the extraction of the introduction, even at full load and, for the greater excursion, the insertion of crockery is also facilitated in the rear part.



PLANETARIUM_WASHING_SYSTEM_72dpi



1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher.



Normal programme: The normal programme is suitable for normal degrees of dirt for everyday use.



Rapid 27 Mins: The rapid 27 mins quick program takes just 27 minutes to wash a load.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Allows you to enable additional programs when selected together with any wash cycle.



Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying.



Delay Timer: The delay timer can postpone the start of the program by up to 24 hours.



Enersave: At the end of the drying cycle a special device slowly automatically opens the door a few centimeters, to ensure perfect drying and to save up to 20% of energy on some models.



FlexiZone: The ½ load flexizone allows you to wash a reduced load saving energy, water and time and there are no restrictions on where the items are placed.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Delicate: Delicate washing program is designed for delicate dishes which are not heavily soiled.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



The symbols show the number of plate settings of the dishwasher.



Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.



STERYL 75°: Intensive wash cycle ideal for plates, pots, pans, cutting boards, feeding bottles.