

LVS222SXIT

Product Family	Dishwashers
Width	60 cm
Commercial height	85 cm
Installation	Free-standing
N° baskets	2
Motor	Single phase
EAN code	8017709229078



Programmes



No. of programmes	5	Normal	Yes
Washing temperatures	38, 50, 65, 70 °C	Ultraclean	Yes
Soak	Yes	Daily 1/2 load	Yes
ECO	Yes		

Options



Energy saving option EnerSave	Yes	Delay timer option	3-6-9 hours, with automatic soak
----------------------------------	-----	--------------------	-------------------------------------

Baskets



Basket colour	Grey	Lower Basket	With 2 foldable racks
Basket components colour	Grey	Lower basket with anti- drip inserts	Yes
Handle	In plastic with stainless steel insert on upper and lower basket	Largest loadable dish in lower basket	30,0 cm
Upper Basket	With central fixed racks	Colour Inner Components	Green anti drop inserts, Green handles, Green Orbital
Height adjustment of the upper basket	On two levels, by extraction	Cutlery basket	13 place settings sliding
Largest loadable dish in upper basket	23,5 cm		


Technical Features




Width (mm)	598 mm	Max water hardness	100°fH;58°dH
Depth (mm)	600 mm	Drying system	Natural condenser drying
Product Height (mm)	848 mm	Tank material	Stainless steel
Controls	Electronic	Filter	Stainless steel
Programme graphics	Symbols	Concealed heating element	Yes
Salt light indicator	Light	Hinges	Self balancing with fixed hinges
Rinse aid indicator	Light	Adjustable feet	Just for levelling
End of cycle indicator	Led on display, with acoustic signal	Insulation level	Medium
Washing system	Orbital	Back cover	Yes, with covered counterweight
Third spray arm	Single	Depth of dishwasher with open door (mm)	1168
Water softener	With electronic setting	Removable top	Yes, with optional KIT
Flood protection system	Single Acquastop	Top cover	In plastic
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%		

Electrical Connection

Plug	(F;E) Schuko	Frequency (Hz)	50 Hz
Connected power	1800 W	Type of connection	Single-phase
Current	10 A	Power supply cable length	140 cm
Voltage	220-240 V		

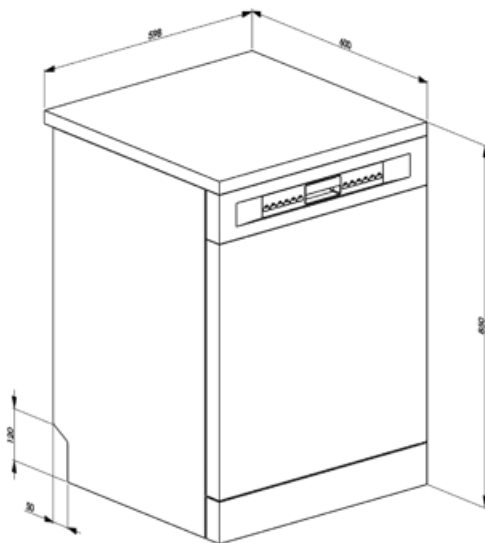


Not included accessories



KITGH

Kit glass holder. It has to be fitted on the first basket but only if there are foldable racks



KITINC












a steel bar fitted on the top will block the dishwasher at the top.



KITPLV2

Kit extension for dishwasher and washing machine: length mt. 2

Symbols glossary

- | | | | |
|--|--|--|---|
|  | Acquastop: Some Smeg dishwashers are equipped with a simple Acquastop: float sensor in the bottom which is necessary to prevent an accidental leakage of water inside the appliance. |  | Anti-drip: Some models of dishwashers are equipped with special polymer nozzles anti-drip, that improve the process of drying. |
|  | A++: Energy efficiency class A++ helps to save up to 20% energy compared to class A. Maximum performance with minimum consumption is guaranteed. |  | Delay Timer: The delay timer can postpone the start of the program by up to 24 hours. |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum. |  | Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash. |
|  | 1/2 load: This program is designed for washing dishes not heavily soiled with partial load of the dishwasher. |  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option. |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying. |  | The symbols show the number of plate settings of the dishwasher. |
|  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher. | | |