

# LVS262DSX



|                   |               |
|-------------------|---------------|
| Product Family    | Dishwashers   |
| Commercial width  | 60 cm         |
| Commercial height | 85 cm         |
| Installation      | Free-standing |
| N° baskets        | 2             |
| Motor             | Inverter 2.0  |
| EAN code          | 8017709334109 |




## Programs



|                           |                   |                   |     |
|---------------------------|-------------------|-------------------|-----|
| N. of programmes          | 8                 | Auto sensor 45-65 |     |
| Washing temperatures      | 50, 60, 65, 70 °C | Mix               | Yes |
| Soak                      | Yes               | Self clean        | Yes |
| Full express - 60 minutes | Yes               | Intense 60°       | Yes |
| Express 50°               | Yes               | Mix 60°           |     |
| ECO                       | Yes               | Auto 50°-60°      | Yes |

## Options



|                    |                |                  |     |
|--------------------|----------------|------------------|-----|
| Delay timer option | Up to 24 hours | Crystal option   | Yes |
| Extreme option     | Yes            | Sterilise option | Yes |

## Baskets


|                                       |                                      |                                       |                       |
|---------------------------------------|--------------------------------------|---------------------------------------|-----------------------|
| Basket colour                         | Grey                                 | Largest loadable dish in upper basket | 20,0 cm               |
| Basket components colour              | Grey                                 | Lower Basket                          | With 2 foldable racks |
| Handle                                | In plastic on upper and lower basket | Largest loadable dish in lower basket | 31.0 cm               |
| Upper Basket                          | With central fixed racks             | Colour Inner Components               | Grey                  |
| Glass holder                          | Yes                                  | Cutlery basket                        | Yes                   |
| Height adjustment of the upper basket | On two levels (4 cm)                 |                                       |                       |

## Technical Features



|                               |   |  |   |
|-------------------------------|---|--|---|
| <b>Width (mm)</b>             | 598 mm  | <b>Water softener</b>                          | With electronic setting   |
| <b>Depth (mm)</b>             | 600 mm  | <b>Turbidity sensor</b>                        | Yes   |
| <b>Display type</b>           | LED display   | <b>Aquatest</b>                                |   |
| <b>Product Height (mm)</b>    | 848 mm  | <b>Water supply</b>                            | Single; cold/hot water max. 60°C - energysave with hot water up to 35%                          |
| <b>Controls</b>               | Electronic  | <b>Max water hardness</b>                      | 90°FH; 50°dH  |
| <b>Display</b>                | Delayed start, Programme time indicator, Time to end indication | <b>Drying system</b>                           | Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle |
| <b>Programme graphics</b>     | Symbols   | <b>Tub material</b>                            | Stainless steel   |
| <b>Salt light indicator</b>   | Light   | <b>Filter</b>                                  | Stainless steel   |
| <b>Rinse aid indicator</b>    | Light   | <b>Concealed heating element</b>               | Yes   |
| <b>Progress indicator</b>     | Yes   | <b>Hinges</b>                                  | Self balancing with fixed hinges  |
| <b>End of cycle indicator</b> | On display, with acoustic signal                                | <b>Adjustable feet</b>                         | Just for levelling  |
| <b>Washing system</b>         | Standard  | <b>Depth of dishwasher with open door (mm)</b> | 1146  |
| <b>Third spray arm</b>        | Single  | <b>Removable top</b>                           | Yes   |
|                               |   | <b>Top cover</b>                               | In plastic  |


## Performance / Energy Label - Reg. 2019



|  |            |   |                  |
|--|------------|---|------------------|
| <b>Energy Efficiency Class</b>   | D          | <b>Programme duration</b>                       | 4:00 h:min       |
| <b>Energy consumption [per 100 cycles, based on the eco programme]</b> | 84 KWh     | <b>Airborne acoustical noise emissions</b>      | 46 dB(A) re 1 pW |
| <b>Rated capacity (ps)</b>   | 13         | <b>Airborne acoustical noise emission class</b> | C                |
| <b>Water consumption [per cycle]</b>                                   | 9,9 litres | <b>Energy efficiency Index (EEI)</b>            | 49,9             |

## Electrical Connection

|                        |              |                                  |              |
|------------------------|--------------|----------------------------------|--------------|
| <b>Plug</b>            | (F;E) Schuko | <b>Frequency (Hz)</b>            | 50 Hz        |
| <b>Connected power</b> | 1950 W       | <b>Type of connection</b>        | Single-phase |
| <b>Current</b>         | 10 A         | <b>Power supply cable length</b> | 150 cm       |
| <b>Voltage</b>         | 220-240 V    |                                  |              |

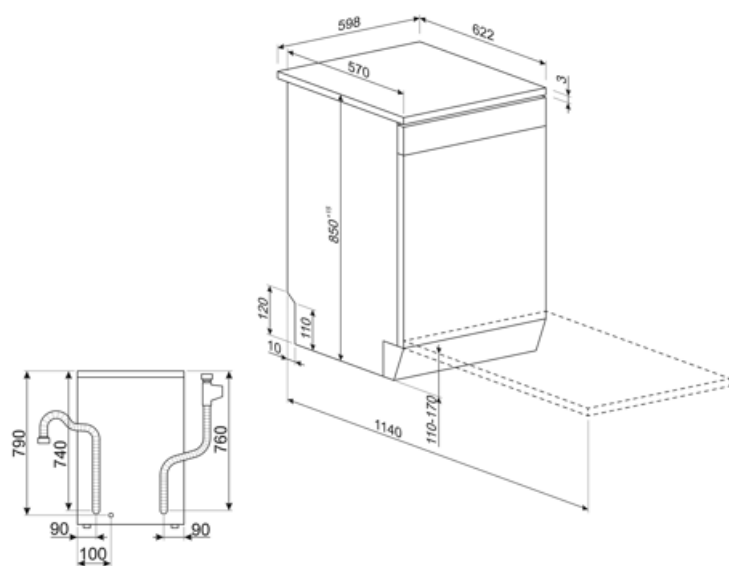


---

## Compatible Accessories

---

### KITINC























### KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



## Symbols glossary

|  |  |   |   |
|--|--|---|---|
|    | The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. Based on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water. |    | Energy efficiency class D   |
|    | Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.  |    | Option which improves the washing results of the selected programme. It increases the wash temperature and duration.  |
|    |  |    | This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4  |
|    | The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.                   |    | Noise Level: Excellent insulation and special devices keep noise to a minimum.  |
|  | Noise Level: Excellent insulation and special devices keep noise to a minimum.   |  | Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate. |
|  | Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.  |  | A quick programme suitable for washing a load with fresh and light soil.  |
|  | Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.  |  | Programme suitable for washing and drying heavily soiled items with encrusted residues.   |
|  | Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.   |  | Dishwasher cleaning cycle. The cycle should be started with the machine empty, without dishes. It is recommended to run the program every 2-3 months, using special dishwasher detergents.  |
|  | Soak programme: The soak programme provides a rinse to prevent dirt from drying.   |  | 13 place settings: Number of place settings.  |
|  | Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.  |  | System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.  |