LVS342CQSX

Product Family	Dishwashers
Commercial width	60 cm
Commercial height	85 cm
Installation	Free-standing
N° baskets	3, Flexi
EAN code	8017709334116



Programs

N. of programmes	8	**ECO**	Yes
Washing temperatures	50, 60, 65, 70 °C	**Mix**	Yes
Soak	Yes	**Intense 60°**	Yes
Full express - 60 minutes	Yes	**Auto 50°-60°**	Yes
Express 50°	Yes		

Options

Delay timer option	Up to 24 hours	**Crystal option**	Yes
Extreme option	Yes	**Sterilise option**	Yes

Baskets


Basket colour	Grey	**Height adjustment of the upper basket**	On two levels (4 cm)
Basket components colour	Grey	**Largest loadable dish in upper basket**	19,0 cm
Handle	In plastic on upper and lower basket	**Lower Basket**	With 2 foldable racks
Upper Basket	With 1 foldable rack	**Largest loadable dish in lower basket**	27,0 cm
Glass holder	Yes	**Colour Inner Components**	Grey

Technical Features



Width (mm)	598 mm
Depth (mm)	600 mm
Display type	LED (external)
Product Height (mm)	848 mm
Controls	Electronic
Display	Delayed start, Programme time indicator, Time to end indication
Programme graphics	Symbols
Salt light indicator	Light
Rinse aid indicator	Light
Progress indicator	Yes
End of cycle indicator	On display, with acoustic signal
Auto switch-off	Yes
Washing system	Orbital
Third spray arm	Single
Water softener	With electronic setting
Turbidity sensor Aquatest	Yes
Flood protection system	Total Acquastop
Water supply	Single; cold/hot water max. 60°C - energysave with hot water up to 35%
Max water hardness	90°fH; 50°dH
Drying system	Natural condenser drying, with Dry Assist automatic door opening system at the end of the cycle
Tub material	Stainless steel
Filter	Stainless steel
Concealed heating element	Yes
Hinges	Self balancing with fixed hinges
Adjustable feet	Just for levelling
Additional gaskets	Yes
Back cover	Yes, with covered counterweight
Depth of dishwasher with open door (mm)	1168 mm
Removable top	Yes
Top cover	In plastic


Performance / Energy Label - Reg. 2019



Energy Efficiency Class	C
Energy consumption [per 100 cycles, based on the eco programme]	75 kWh
Rated capacity (ps)	14
Water consumption [per cycle]	10.5 litres
Programme duration	4:00 h:min
Airborne acoustical noise emissions	44 dB(A) re 1 pW
Airborne acoustical noise emission class	B
Energy efficiency Index (EEI)	43.9


Electrical Connection

Connected power	1950 W
Current	10 A
Voltage	220-240 V
Frequency (Hz)	50 Hz
Type of connection	Single-phase
Power supply cable length	150 cm
Plug	(F;E) Schuko

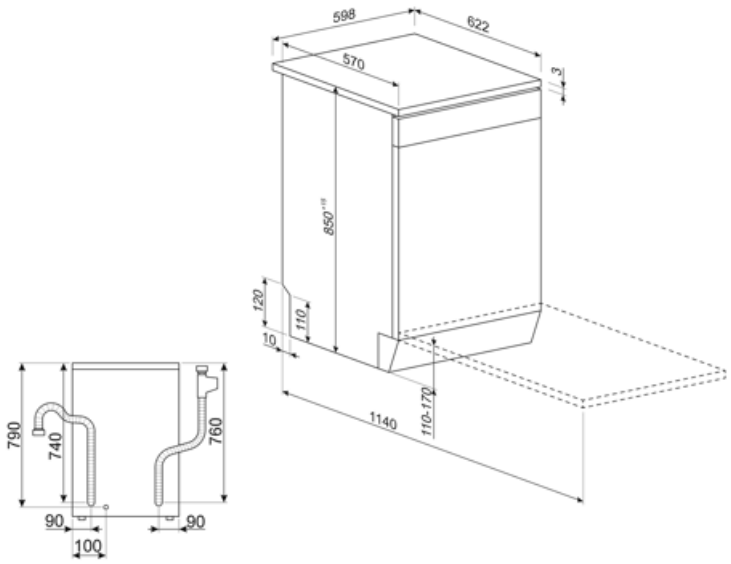
598
622
570
3
850+10
120
110
10
1140
110-170
790
740
760
90
90
100

Compatible Accessories

KITINC



KITPLV2

Kit extension for dishwasher and washing machine: lenght mt. 2



Symbols glossary



The Aquatest sensor is an electronic sensor that measures the degree of water transparency at the end of the initial soaking phase. ased on the values measured, the sensor sets the most suitable programme, thus obtaining the best washing results with the minimum amount of water.



Delay Timer: Option to postpone the start of the desired programme by up to 24 hours in order to programme the dishwasher to run at the desired time.



Noise Level: Excellent insulation and special devices keep noise to a minimum.



Eco: Eco, this economic wash programme uses a low amount of water and energy in order to provide the most environmentally friendly cleaning option.



Mix: The Mix programme is suitable for mixed crockery and everyday pots and pans, without any particular incrustation.



14 place settings: Number of place settings.



System WaterSave ensures the best washing results with minimal water consumption depending on the model of dishwasher.



Wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. When this program is selected, the dishwasher recognises the type of dirt and automatically adjusts the washing parameters as appropriate.



Programme suitable for washing and drying heavily soiled items with encrusted residues.



Energy efficiency class C



LED display: to show programmes, functions and options selected and the time to the end of the cycle.



Orbital wash system distributes water evenly throughout the 60cm dishwasher cavity, directing water with precision to ensure an excellent wash.



A quick programme suitable for washing a load with fresh and light soil.



Soak programme: The soak programme provides a rinse to prevent dirt from drying.



Total Acquastop: In addition to the partial Acquastop protection present in all Smeg dishwashers, some models have an electronic device fitted to the water intake hose, which monitors water levels in the machine, detects leaks in the hose and switches off the water supply immediately when necessary.



Quick wash cycle for normally soiled mixed loads such as dishes and pans, even with dried-on residues. Dishes are washed and dried in 60 minutes.



This option provides special care for a delicate load. It prevents rapid changes in the wash temperature of the selected programme and reduces it to 4



Option which improves the washing results of the selected programme. It increases the wash temperature and duration.

Option which provides better cleaning results by keeping the temperature between 65 and 70°C for at least 10 minutes during the last rinsing phase.

The work aimed at continuous improvement has allowed the creation of the second generation of the Inverter motor 2.0, characterised by greater efficiency and durability over time, which allows very high performance and a lower energy consumption and noise level.