

LYP116R

Sink materialStainless steelTypeMonoblock sink

No. of bowls 2

Drainer Reversible

EAN code 8017709258955



35 mm

Aesthetics



AestheticUniversaleBuilding in typeStandardSeriesOmniLogoEmbossedColourStainless steelTap hole / precut tapNo Taphole

Finishing Pre-polished hole

	Bowl type RH	Bowl thickness (mm)	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Traditional	0.6	330 * 370 * 150	150	90	Yes, traditional	Side bowl	3.5"
LH Bowl	Traditional	0.6	330 x 370 x 150	150	90		Side bowl	3.5"

Technical Features



Frame thickness 0,6 mm Tap hole diameter

Frame depth (mm) 8 Dividing wall width 40 mm Dimensions of the $150 \times 1160 \times 500$ mm Drainer inclination 1°

product (mm) Gasket type Sealing paste

Cutout dimension 1140 x 480 mm No. of clips 8 topmount (mm)

Type of clips Standard

Undermount cutout

radius

10 mm




Height from kitchen top 8 mm Base unit size 80 cm

Accessories Included

Accessories for installation

Strainer, Siphon with dishwasher outlet connection, Fixing clips, Gasket

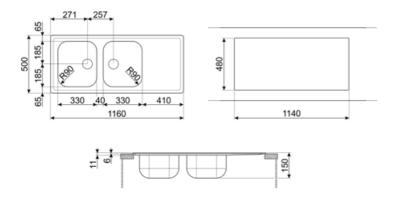



Compatible Accessories





Siphon double bowls sinks (dishwasher connection included)



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



RND2V



2 Bowls standard Rondò waste kit with rectangular overflow



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



Symbols glossary



Cupboard width required for sink installation



Sink depth - depending on the model, the depth can be from 13 to 24,5



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.