

LZ150CT

Sink material Composite Composite sink Type

No. of bowls 1

Drainer Reversible

EAN code 8017709274627



Aesthetics



Universale **Aesthetic** Applied/on overflow Logo Series White, Anthracite, Cream,

Rigae Alternative colours available Beige Colour Cement / Concrete

Tap hole / precut tap Prepared Standard

Building in type hole

	Bowl type LH	Bowl dimensions LH, WxDxA (mm)	LH Bowl depth (mm)	Radius corner left bowl	Overflow LH bowl	Strainer position LH bowl	Strainer dimension LH bowl
LH Bowl	Traditional	420 x 480 x 210	210	80	Yes, traditional	Side bowl	3.5"

Technical Features















Characteristics composite material

Antibacterial, Anti-scratch, Termal schock resistant, High temperatures

resistant, Impact resistant, Easy to clean, UV Resistant

Frame depth (mm)

Dimensions of the product (mm) **Cutout dimension**

topmount (mm)

210x1000x500 mm

980 X 480 mm

Base unit size 60 cm Tap hole 2 Tap hole diameter 35 mm

Drainer inclination 2 ° No. of clips 10

Type of clips Standard

SMEG SPA 9/5/2024



 ${\bf Undermount}\ {\bf cutout}$

30 mm

radius


Height from kitchen top

10 mm

Accessories Included

Accessories for installation

Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

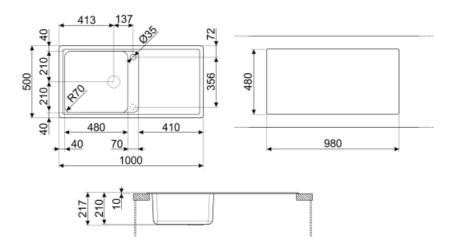

SMEG SPA 9/5/2024



Not included accessories



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



COL36

St/steel colander for MINIMUM radius bowls, measures 370 x 410 x 30 mm



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

SMEG SPA 9/5/2024



Symbols glossary (TT)



Antibacterial



Cupboard width required for sink installation



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets



High temperatures resistant



Easy to clean



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from 13 to 24,5



Termal schock resistant



Impact resistant



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.

SMEG SPA 9/5/2024