LZ8116CT

Sink material	Composite
Type	Composite sink
No. of bowls	2
Drainer	Reversible
EAN code	8017709345037



Aesthetics

Aesthetic	Universale	**Logo**	Applied/on overflow
Colour	Cement / Concrete	**Alternative colours available**	Black
Series	Rigae		
Building in type	Standard	**Tap hole / precut tap hole**	Prepared

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Traditional	330 x 420 x 210	210	80	Yes, traditional	Side bowl	3.5"
LH Bowl	Traditional	330 x 420 x 210	210	80		Side bowl	3.5"


Technical Features

Characteristics composite material	Antibacterial, Easy to clean, Anti-scratch , Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant	**Base unit size**	80 cm
		Tap hole diameter	35 mm
		Dividing wall width	38 mm
		Drainer inclination	2 °
		No. of clips	12
Frame depth (mm)	10	**Type of clips**	Standard

Dimensions of the product (mm)	210x1160x500 mm
Cutout dimension topmount (mm)	1140 X 480 mm
Undermount cutout radius	30 mm
Height from kitchen top	10 mm

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

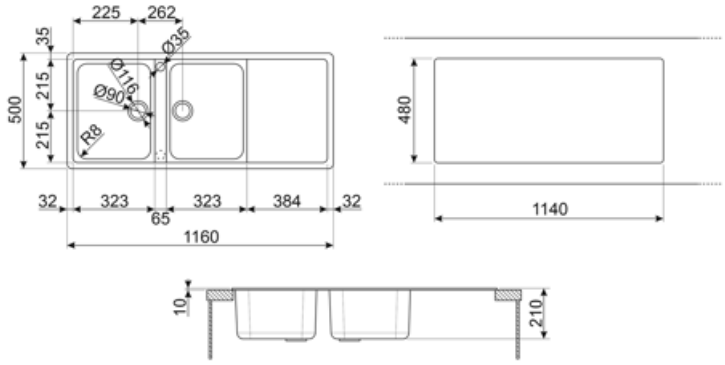

Compatible Accessories



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Alternative products



LZ8116N

Colour: Black

Symbols glossary



Antibacterial



Cupboard width required for sink installation.



Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.



High temperatures resistant



Thanks to the double tap hole, most of our sinks are easily reversible, giving you the flexibility to make any type of kitchen composition.



UV protection, does not fade over time.



Antiscratch



Sink depth - depending on the model, the depth can be from13 to 24,5.



Easy to clean



Impact resistant



Termal schock resistant