LZ862P

Sink material	Composite
Type	Composite sink
No. of bowls	2
EAN code	8017709183240



Aesthetics

Aesthetic	Universale	**Logo**	Applied/on overflow
Colour	Cream	**Alternative colours available**	White, Anthracite, Beige, Copper, Cemento / Concrete
Series	Rigae	**Tap hole / precut tap hole**	Prepared
Building in type	Standard		

	Bowl type RH	Bowl dimensions, WxDxH (mm)	Bowl depth (mm)	Radius corner right bowl (mm)	Overflow	Strainer position	Strainer dimension
RH Bowl	Traditional	371 x 420 x 205	205	80	Yes, traditional	Side bowl	3.5"
LH Bowl	Traditional	371 x 420 x 205	205	80		Side bowl	3.5"


Technical Features

Characteristics composite material	Antibacterial, Easy to clean, Anti-scratch , Termal schock resistant, High temperatures resistant, Impact resistant, UV Resistant	**Tap hole**	2
		Tap hole diameter	35 mm
		Dividing wall width	38 mm
		No. of clips	8
		Type of clips	Standard
Frame depth (mm)	10	**Possibility to install waste disposal**	Yes

Dimensions of the product (mm)	205x860x500 mm
Cutout dimension topmount (mm)	840 X 480 mm
Undermount cutout radius	30 mm
Height from kitchen top	10 mm
Base unit size	90 cm

Accessories included

Accessories for installation	Strainer, Savespace siphon with dishwasher outlet connection, Fixing clips

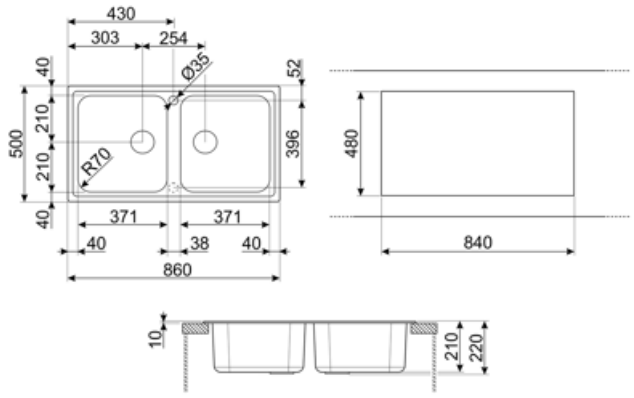

Compatible Accessories



KITDSQ

Soap dispenser chrome finishing with square knob 40x40 mm



KITFD050

Waste disposal 0,5 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD075

Waste disposal 0,75 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet



KITFD100

Waste disposal 1 HP, Motor: 1/2 horsepower, Fits all sinks with 3 1/2" waste outlet

Alternative products



LZ862B

Colour: White



LZ862CT

Colour: Cement / Concrete



LZ862AV2

Colour: Oats



LZ862A2

Colour: Anthracite

Symbols glossary


Antibacterial


Antiscratch



Cupboard width required for sink installation.


Standard installation: Traditional installation in tabletop, suitable for any kitchen sets.


Easy to clean


High temperatures resistant


Impact resistant


Termal schock resistant



UV protection, does not fade over time.