

MI1CR



Product family	Taps
Material	Brass
Swivelling spout	Yes
Swivelling spout rotation	360 °



Aesthetics

Aesthetic	Universale	Finishing	Glossy
Colour	Chrome	Jet type	Single jet
Spout type	L spout	Aerator	Yes
Tap type	Single lever	Flexible hoses number	2


Technical Features



Characteristics	ESC, WSC	Optimal pressure	3 bar
Flexible hoses lenght	370 mm	Water production (l/min)	12 l
Flexible hoses connection	3/8 "	Ceramic disc cartridge type	35 Ø
Maximum pressure	5 bar	Tap hole diameter	35 mm
Minimum pressure	1 bar		

Logistic Information

Product height (mm)	325 mm
---------------------	--------

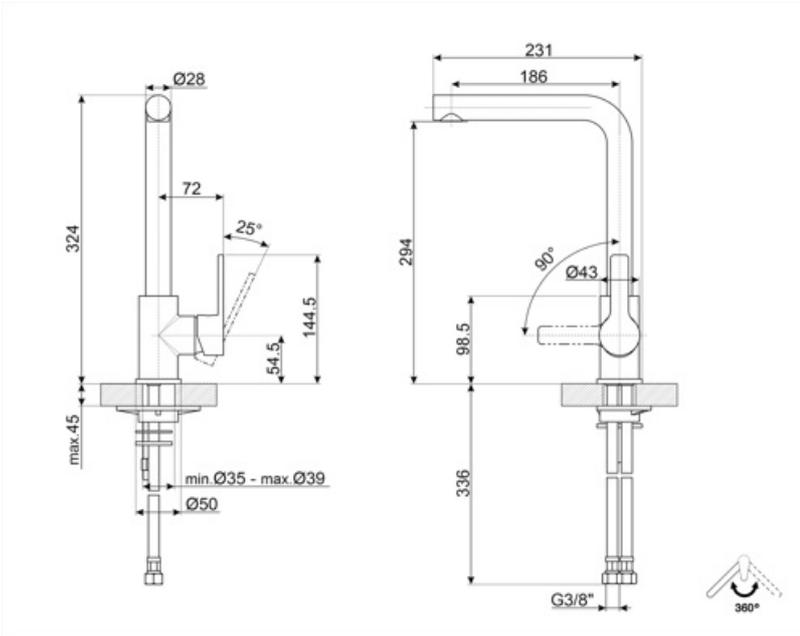

Compatible Accessories



STABMIX
Tap stabiliser

Symbols glossary

- | | | | |
|--|--|---|--|
|  | ESC: with the ESC Energy Saving Cartridge system the control lever positioned in the middle dispenses only cold water, and not 50% of hot and 50% of c |  | WSC: with the WSC Water Saving Cartridge the control lever stops halfway, causing 50% of the water (sufficient for normal cooking activities) to be di |
|  | Swivel spout rotation 360° | | |