

PGF30F



Product Family	Hob
Built-in type	Ultra-low profile
Dimensions	30 cm
Power supply	Electric
Type	Electric plates
EAN code	8017709141721



Aesthetics



Aesthetic	Classica
Colour	Stainless steel
Finishing	Satin
Material	Stainless Steel
Type of steel	Brushed
Type of control setting	Control knobs
Control knob position	Front
No. of controls	1
Controls colour	Steel effect

Program / Functions

No. of electric plate cook zones	1
Total no. of cook zones	1

Options

Worktop Cut-Out	494x292 mm
-----------------	------------

Technical Features



8th zone position	Central	Residual heat indicator	Yes
-------------------	---------	-------------------------	-----

Automatic switch off when overheat Yes

Accessories included


Other accessories St/Steel lid

Electrical Connection

Plug	Not present	Voltage (V)	220-240 V
Electrical connection rating (W)	2200 W	Frequency (Hz)	50/60 Hz
Current	16 A	Power supply cable length	120 cm

Gas Connection

Gas connection	Cilindrical	Gas connection rating (W)	2200 W
----------------	-------------	---------------------------	--------

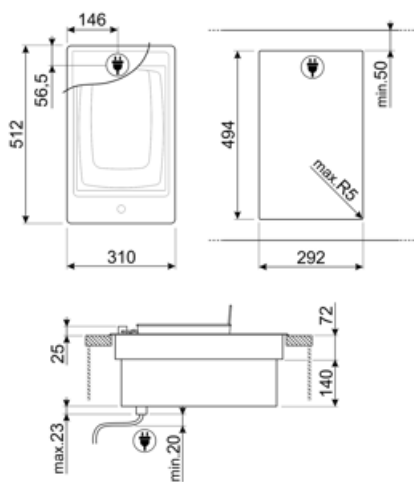

Compatible Accessories

6MP1PGF

6 Linea knobs for PGF hobs



LGPGF-1

Aluminium connecting strip for PGF



Symbols glossary



Ultra-low profile: Installation of product with flat edge - height of 1 mm.



Overheat protection: The safety system that automatically turns off the hob in case of overheating of the control unit.



Knobs control



Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out.

Benefit (TT)

Inox

Maximum resistance even at high temperatures: the stainless steel surface ensures durability and deformation resistance, withstanding thermal shocks without damage

Accurate power adjustment via knobs, for more precise cooking level control

Control knob position frontal

Instant and intuitive control thanks to front controls, easily accessible for practical use