

PGF32C



Product familie

Type

Afmeting

Voeding

Type

EAN-code

Kookplaat

Vlak opbouw

30 cm

Elektrisch

Keramisch

8017709138035



Design



Design

Kleur

Afwerking

Materiaal

Type glas

Kader

Kleur kader

Bediening

Positie bediening

Aantal bedieningsknoppen

Kleur bedieningsknoppen

Logo

Classici

Stainless steel/Black

Glas

Glas

Keramisch

Ja

Inox

Bedieningsknoppen

Vooran

2

Inox look

In reliëf

Program / Functions

Aantal keramische kookzones

2

Vermogenniveaus

9

Totaal aantal kookzones

2

Opties

Worktop Cut-Out

494x292 mm


Technische specificaties



Middenvoor - Keramisch - enkel - 1.20 kW - Ø 14.0 cm
Middenachter - Keramisch - enkel - 1.80 kW - Ø 18.0 cm
Restwarmte indicator Ja

Elektrische aansluiting

Nominale aansluitwaarde	3000 W	Frequentie	50/60 Hz
Stroom	13 A	Lengte voedingskabel	120 cm
Spanning (V)	220-240 V	Stekker	Nee

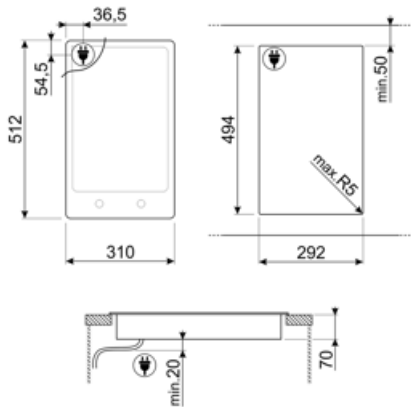

Compatible Accessories

6MP1PGF

6 Linea knobs for PGF hobs



SCRP





Schraper voor inductie- en vitrokeramische kookplaten

LGPGF-1

Aluminium verbindingsstrip voor PGF-kookplaten



Symbols glossary

- | | | | |
|--|---|---|--|
|  | Ultra-low profile: Installation of product with flat edge - height of 1 mm. |  | Glass ceramic: The base of the hob is made glass ceramic. Heating is performed by the heating elements Hi-Light. |
|  | Indication of residual heat: After the glass ceramic hob is switched off the residual heat indicator shows which of the heating zones still remains hot. When the temperature drops below 60 ° C, the indicator goes out. |  | Knobs control |